



Straight Run Single Hinge

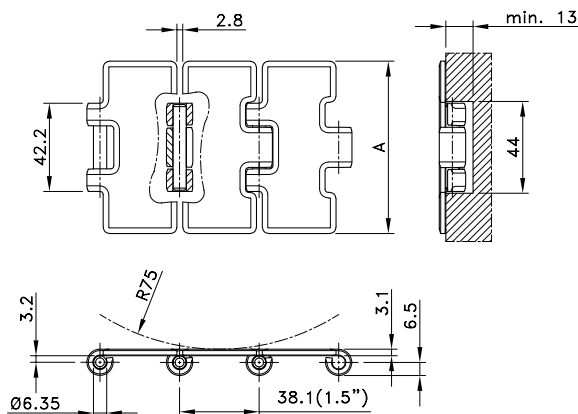

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	mm		N
10-Series							
10S31	10139369	82.5	3.25	2.55	0.10	no	4950


Standard length: 3.048 m - 10 feet (80 links).

Straight Run Single Hinge Max-Line

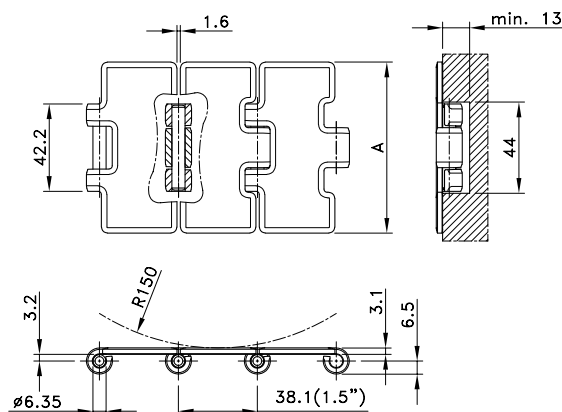

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	mm	N		
10-Series							
10S31M	10139371	82.5	3.25	2.61	0.18	no	4950
10S42M	10375167	114.3	4.50	3.28	0.25	no	
10S72M	10139372	190.5	7.50	4.99	0.60	no	
60-Series							
60S22M	10375173	63.5	2.50	2.14	0.10	no	6000
60S25M	10375175	66.7	2.63	2.27	0.18	no	
60S23M	10375174	69.9	2.75	2.34	0.18	no	
60S30M	10375176	76.2	3.00	2.43	0.18	no	
60S31M	10139386	82.5	3.25	2.61	0.18	no	
60S31XM	10139394	82.5	3.25	2.61	0.08	yes	
60S84XM	10139395	84.0	3.30	2.63	0.08	yes	
60S32M	10375177	88.9	3.50	2.71	0.18	no	
60S40M	10139387	101.6	4.00	3.17	0.25	no	
60S42M	10139388	114.3	4.50	3.28	0.25	no	
60S60M	10375178	152.4	6.00	4.14	0.40	no	
60S72M	10139389	190.5	7.50	4.99	0.60	no	


Straight Run Single Hinge Max-Line (continued)

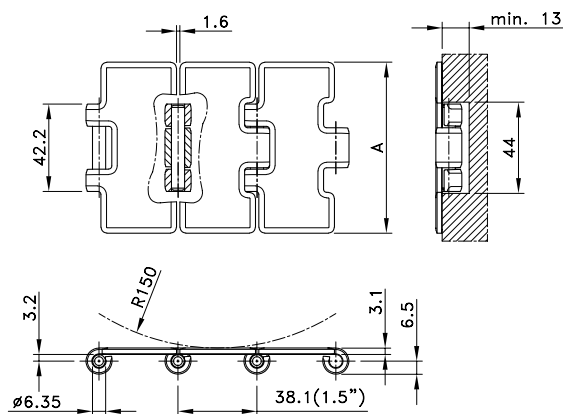

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					N
		mm	inch	kg/m	mm		
60-Series HB							
60S31XM HB	10374925	82.5	3.25	2.50	0.08	yes	6000
60S84XM HB	10375095	83.8	3.30	2.52	0.08	yes	
66-Series XHB							
66S31XM XHB	10139367	82.5	3.25	2.61	0.08	yes	6000
66S84XM XHB	10139368	83.8	3.30	2.63	0.08	yes	
66S72M XHB	10375156	190.5	7.50	4.99	0.60	no	
Carbon Steel							
S815-2.25IN	10139396	57.2	2.25	2.12	0.40	no	8350
S815-2.63IN	10139397	66.7	2.63	2.27	0.40	no	
S815-3.25IN	10139398	82.5	3.25	2.61	0.40	no	
S815-4IN	10139400	101.6	4.00	3.17	0.50	no	
S815-4.5IN	10139401	114.3	4.50	3.28	0.60	no	
S815-6IN	10139402	152.4	6.00	4.14	0.80	no	
S815-7.5IN	10139403	190.5	7.50	4.99	0.90	no	
Austenitic Chrome Nickel							
SS815-2.25IN	10139374	57.2	2.25	2.12	0.18	no	3500
SS815-2.625IN	10139376	66.7	2.63	2.27	0.18	no	
SS815-3.25IN	10139376	82.5	3.25	2.61	0.18	no	
SS815-3.5IN	10139378	88.9	3.50	2.71	0.18	no	
SS815-4IN	10139379	101.6	4.00	3.17	0.25	no	
SS815-4.5IN	10139380	114.3	4.50	3.28	0.25	no	
SS815-6IN	10139381	152.4	6.00	4.14	0.40	no	
SS815-7.5IN	10139382	190.5	7.50	4.99	0.60	no	

Standard length: 3.048 m - 10 feet (80 links).


Straight Run Double Hinge Max-Line

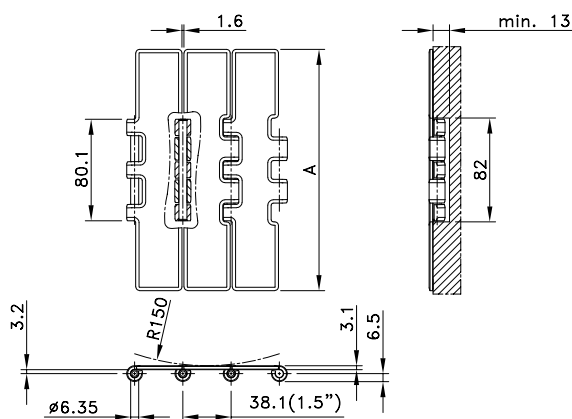

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	mm	N		
66-Series							
66S77M	10375158	190.5	7.50	5.64	0.60	no	8900
Opti-Plus							
SSC802-4.5IN	10375231	114.3	4.50	4.00	0.25	no	8900
SSC802-7.5IN	10068061	190.5	7.50	5.64	0.60	no	
Carbon Steel							
SC800-7.5IN	10068062	190.5	7.50	5.64	0.90	no	15000

Standard length: 3.048 m - 10 feet (80 links).

Straight Run Heavy Duty Max-Line

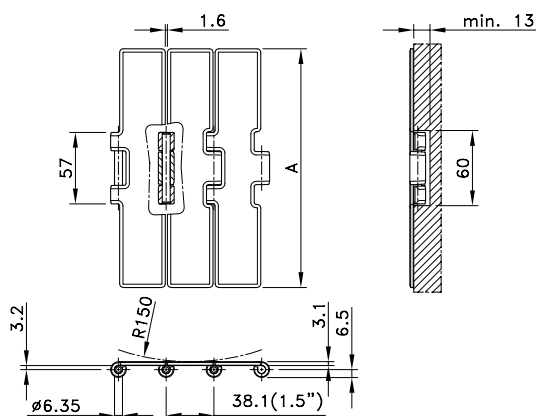


Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		mm	inch				
		mm	inch	kg/m	mm		N
60-Series							
60S75M	10375097	190.5	7.50	5.10	0.60	no	7000
66-Series							
66S75M	10375157	190.5	7.50	5.10	0.60	no	7000

Standard length: 3.048 m - 10 feet (80 links).

NOTE: 60 S 75 M is recommended for medium duty applications, 66 S 75 M is recommended for heavy duty applications.

Straight Run Single Hinge Tab Max-Line

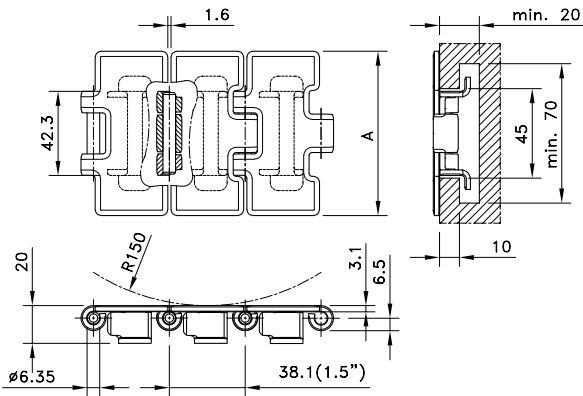


Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					N
		mm	inch	kg/m	mm		
Opti-Plus							
SSC812TAB-3.25IN	10375218	82.5	3.25	3.14	0.18	no	6000
SSC812TAB-4.5IN	10375219	114.3	4.50	3.88	0.25	no	
SSC812TAB-7.5IN	10375221	190.5	7.50	5.67	0.60	no	

Standard length: 3.048 m - 10 feet (80 links).




Straight Run Mini Hinge

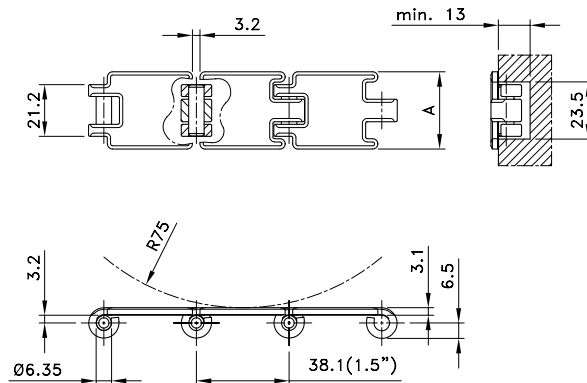

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	mm		N
60-Series							
60S11	10139384	31.8	1.25	1.07	0.18	no	2500
60S13	10375171	44.5	1.75	1.35	0.18	no	


Straight Run Single Hinge Max-Line 1"

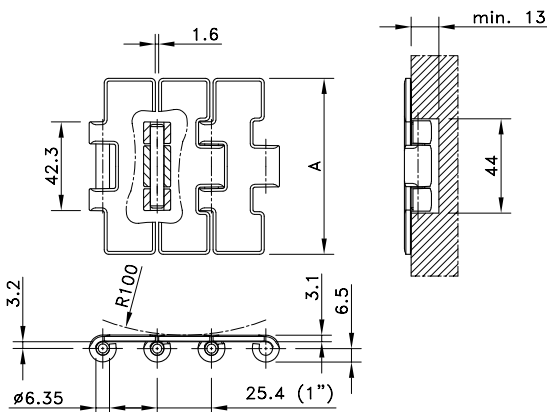

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		mm	inch				
				kg/m	mm		N
Opti-Plus							
SSC512-2.17IN	10178888	55.1	2.17	2.29	0.18	no	5000
SSC512-2.5IN	10375236	63.5	2.50	2.49	0.18	no	
SSC512-2.83IN	10375239	71.9	2.83	2.65	0.18	no	
SSC512-2.83IN	10375239	82.5	3.25	2.86	0.18	no	
SSC512-3.5IN	10375241	88.9	3.50	3.01	0.18	no	
SSC512-4IN	10375242	101.6	4.00	3.26	0.25	no	

Standard length: 3.048 m - 10 feet (120 links).


Straight Run Double Hinge Max-Line 1”

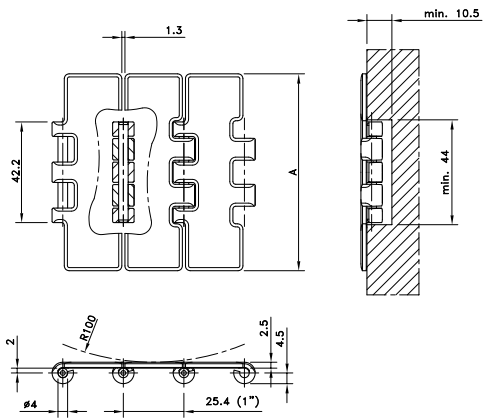

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	mm		N
661-Series							
661S31SM	10186166	82.5	3.25	1.96	0.10	yes	5100
661S84SM	10375162	83.8	3.30	1.97			

Standard length: 3.048 m – 10 feet (120 links).


Magnetflex® Single Hinge Max-Line

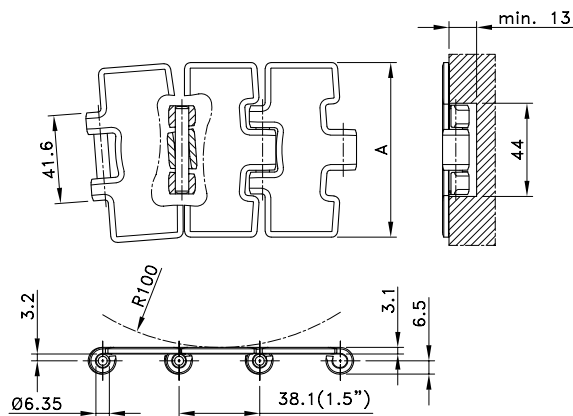

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					N
		mm	inch	kg/m	mm		
10-Series							
10M31M	10139432	82.5	3.25	2.50	0.18	yes	4950
10M42M	10139433	114.3	4.50	3.12	0.25	yes	
10M72M	10139434	190.5	7.50	4.59	0.60	yes	
60-Series							
60M31M	10139435	82.5	3.25	2.50	0.18	yes	6000
60M31XM	10139438	82.5	3.25	2.50	0.08	yes	
60M84XM	10139439	83.8	3.30	2.52	0.08	yes	
60M42M	10139436	114.3	4.50	3.12	0.25	yes	
60M72M	10139437	190.5	7.50	4.59	0.60	yes	
60-Series HB							
60M31XM HB	10303023	82.5	3.25	2.61	0.08	yes	6000
60M84XM HB	10201075	83.8	3.30	2.63	0.08	yes	
66-Series XHB							
66M31XM XHB	10139430	82.5	3.25	2.50	0.08	yes	6000
66M84XM XHB	10139431	83.8	3.30	2.52	0.08	yes	
66M72M XHB	10375099	190.5	7.50	4.59	0.60	yes	

Standard length: 3.048 m - 10 feet (80 links). Sideflex radius min. 500 mm.


Sideflex Single Hinge Bevel Max-Line

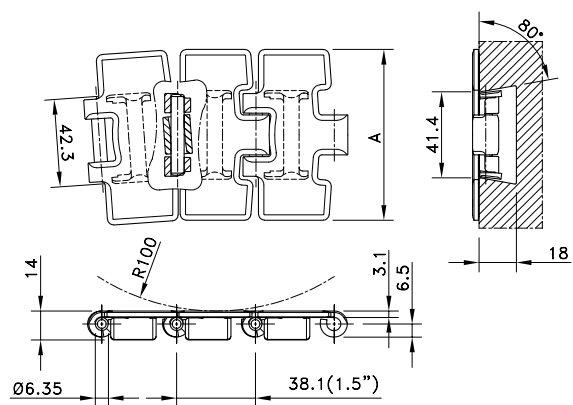

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					N
		mm	inch	kg/m	mm		
Opti-Plus							
SSC8811B-3.25IN	10375214	82.5	3.25	2.90	0.18	no	6000
SSC8811B-3.5IN	10375215	88.9	3.50	3.10	0.18	no	
SSC8811B-4.5IN	10068071	114.3	4.50	3.60	0.25	no	
SSC8811B-7.5IN	10068072	190.5	7.50	5.30	0.60	no	

Standard length: 3.048 m - 10 feet (80 links). Sideflex radius min. 500 mm.


Sideflex Single Hinge Bevel

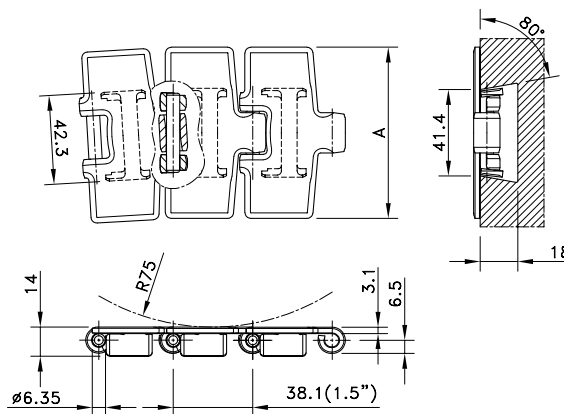

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	N		
Austenitic Chrome Nickel							
SS881B-3.25IN	10139419	82.5	3.25	2.97	0.18	no	3500
SS881B-4.5IN	10139420	114.3	4.50	3.71	0.25	no	
SS881B-7.5IN	10139421	190.5	7.50	5.49	0.60	no	
Carbon Steel							
S881B-3.25IN	10139426	82.5	3.25	2.97	0.40	no	8350
S881B-4.5IN	10139427	114.3	4.50	3.71	0.60	no	
S881B-7.5IN	10139428	190.5	7.50	5.49	0.90	no	

Standard length: 3.048 m - 10 feet (80 links).
Sideflex radius min. 500 mm.


Sideflex Single Hinge Tab

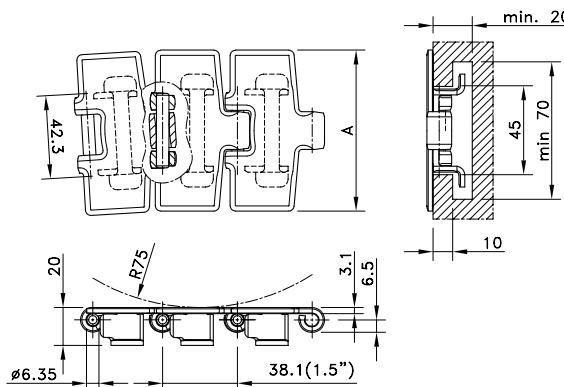

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch				
Austenitic Chrome Nickel							
SS881TAB-3.25IN	10139416	82.5	3.25	2.97	0.18	no	3500
SS881TAB-4.5IN	10139417	114.3	4.50	3.71	0.25	no	
SS881TAB-7.5IN	10139418	190.5	7.50	5.49	0.60	no	
Carbon Steel							
S881TAB-3.25IN	10139423	82.5	3.25	2.97	0.40	no	8350
S881TAB-4.5IN	10139424	114.3	4.50	3.71	0.60	no	
S881TAB-7.5IN	10139425	190.5	7.50	5.49	0.90	no	

Standard length: 3.048 m - 10 feet (80 links).
Sideflex radius min. 500 mm.


Sideflex Single Hinge Tab Max-Line

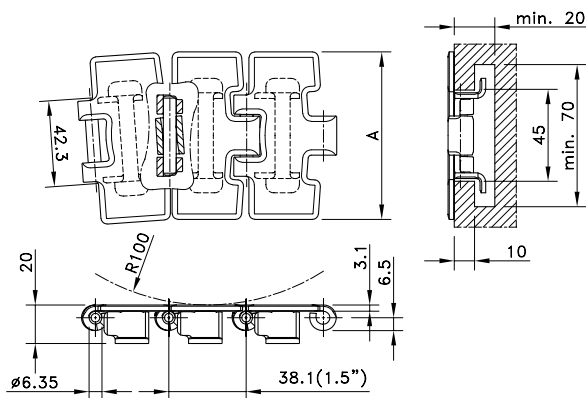

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	N		
10-Series							
10T31M	10139441	82.5	3.25	3.10	0.18	no	4950
Opti-Plus							
SSC8811TAB-3.25IN	10068068	82.5	3.25	3.10	0.18	no	6000
SSC8811TAB-3.5IN	10375211	88.9	3.50	3.30	0.18	no	
SSC8811TAB-4.5IN	10068069	114.3	4.50	3.80	0.25	no	
SSC8811TAB-7.5IN	10068070	190.5	7.50	5.50	0.60	no	

Standard length: 3.048 m - 10 feet (80 links).
Sideflex radius min. 500 mm.



Sideflex Single Hinge Small Radius

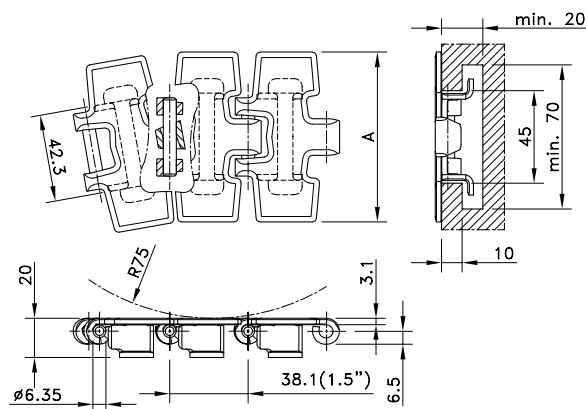

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	mm		N
Opti-Plus							
SSR8811TAB BO-3.25IN	10375072	82.5	3.25	3.10	0.18	no	4500

Standard length: 3.048 m - 10 feet (80 links).
Sideflex radius min. 200 mm.


Magnetflex® Heavy Duty Max-Line

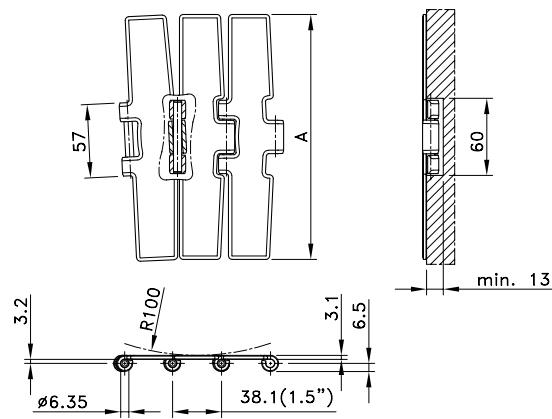

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	N			
60-Series							
60M75M	10374937	190.5	7.50	5.03	0.60	yes	7000
66-Series							
66M75M	10375100	190.5	7.50	5.03	0.60	yes	7000

Standard length: 3.048 m - 10 feet (80 links).
Sideflex radius min. 750 mm.
NOTE: 60 M 75 M is recommended for medium duty applications, 66 M 75 M is recommended for heavy duty applications.


Magnetflex® Double Hinge Max-Line 1”

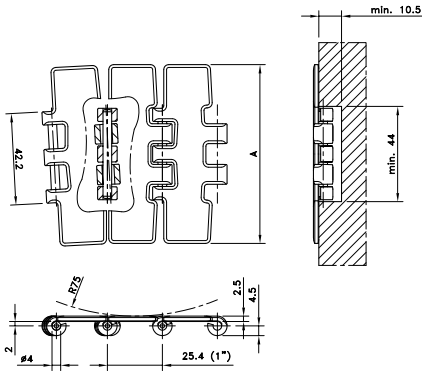

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	mm		N
661-Series							
661M31SM	10375108	82.5	3.25	1.96	0.10	yes	5100
661M84SM	10375109	83.8	3.30	1.97			

Standard length: 3.048 m – 10 feet (120 links).
Sideflex radius min. 500 mm.


Straight Run Single Hinge RubberTop®

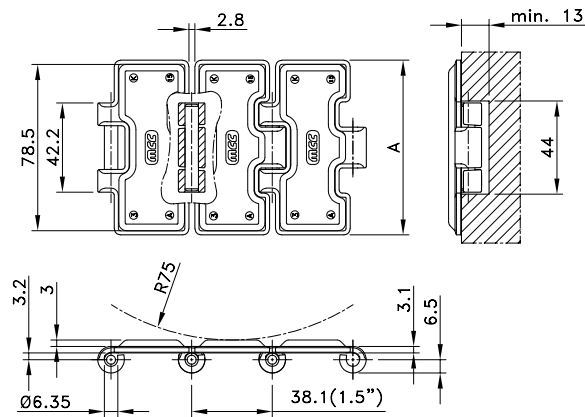

Chain Type	Code Number	Plate Width		Weight	Polished Hinge Eyes	Working Load (max.)
		A				N
		mm	inch	kg/m		
66-Series						
66S31R	10139365	82.5	3.25	2.80	no	6000

Standard length: 3.048 m - 10 feet (80 links).



Straight Run Single Hinge Tab RubberTop®

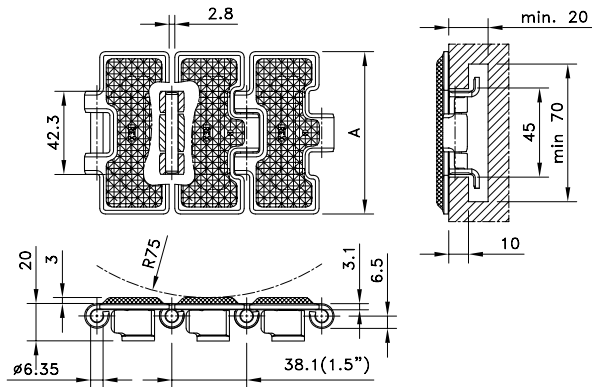

Chain Type	Code Number	Plate Width		Weight	Polished Hinge Eyes	Working Load (max.)
		A				
		mm	inch	kg/m		N
Opti-Plus						
SSR812RT TAB-3.25IN	10068067	82.5	3.25	3.40	no	6000

Standard length: 3.048 m - 10 feet (80 links).

Straight Run Double Hinge Max-Line RubberTop®

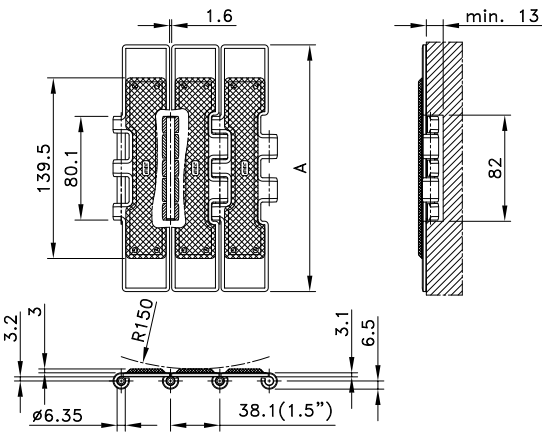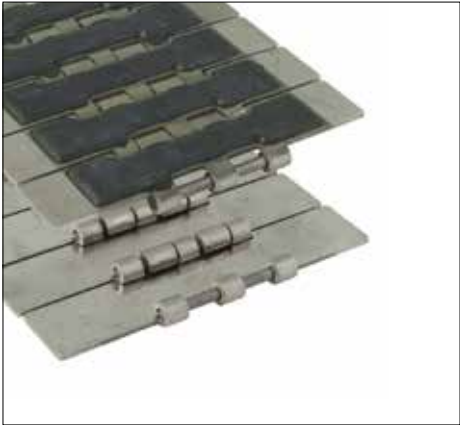



Chain Type	Code Number	Plate Width		Weight	Polished Hinge Eyes	Working Load (max.)
		A				N
		mm	inch	kg/m		
66-Series						
66S77RM	10139366	190.5	7.50	6.20	no	8900

Standard length: 3.048 m - 10 feet (80 links).



Metal TableTop® Chains with RubberTop®


Straight Run Heavy Duty Max-Line RubberTop®

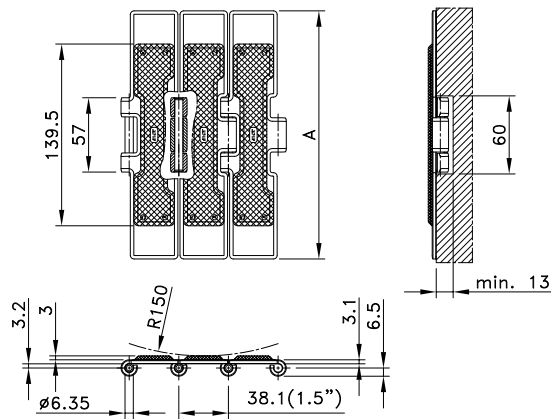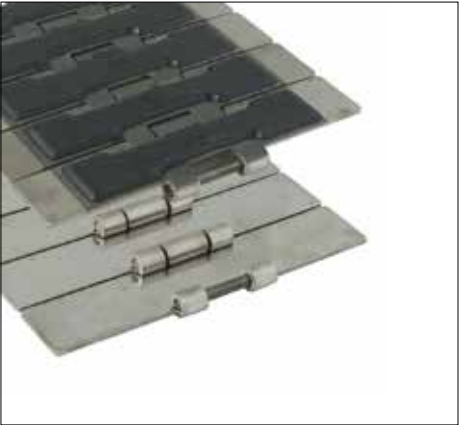

Chain Type	Code Number	Plate Width		Weight	Polished Hinge Eyes	Working Load (max.)
		A				N
		mm	inch	kg/m		
66-Series						
66S75RM	10139128	190.5	7.50	5.21	no	7000

Standard length: 3.048 m - 10 feet (80 links).


Straight Run Heavy Duty Tab Max-Line RubberTop®

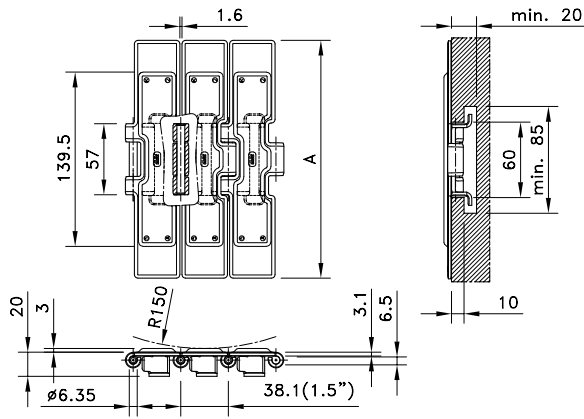

Chain Type	Code Number	Plate Width		Weight	Polished Hinge Eyes	Working Load (max.)
		A				N
		mm	inch	kg/m		
66-Series						
66ST75RM	10375069	190.5	7.50	6.21	no	7000

Standard length: 3.048 m - 10 feet (80 links).


Magnetflex® Single Hinge Max-Line RubberTop®

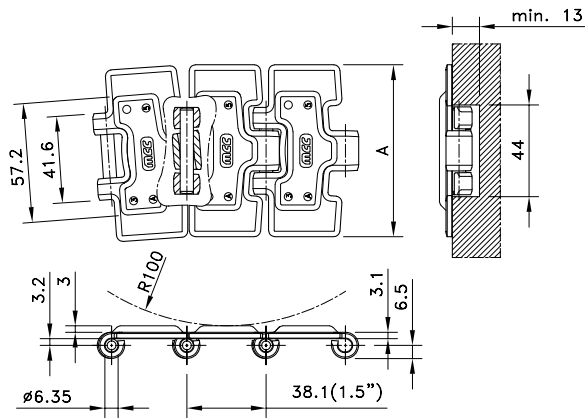

Chain Type	Code Number	Plate Width		Weight	Polished Hinge Eyes	Working Load (max.)
		A				N
		mm	inch	kg/m		
66-Series						
66M72RM	10375103	190.5	7.50	4.70	yes	6000

Standard length: 3.048 m - 10 feet (80 links).
Sideflex radius min. 500 mm.


Side-flexing Single Hinge Tab Max-Line RubberTop®

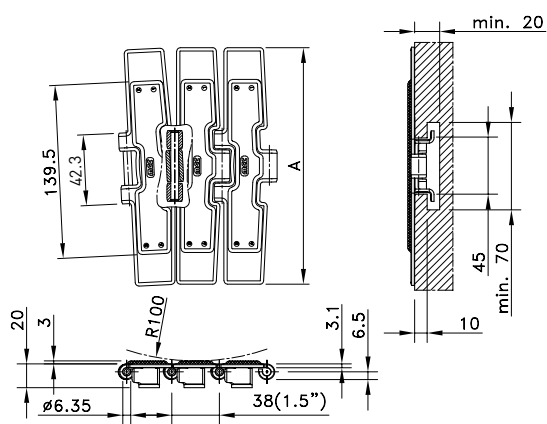

Chain Type	Code Number	Plate Width		Weight	Polished Hinge Eyes	Working Load (max.)
		A				
		mm	inch	kg/m		N
66-Series						
66T72RM	10375073	190.5	7.50	5.30	no	6000
Opti-Plus						
SSC8811RT TAB-3.25IN	10375217	82.5	3.25	3.30	no	6000

Standard length: 3.048 m - 10 feet (80 links).
Sideflex radius min. 500 mm.

Magnetflex® Heavy Duty Max-Line RubberTop®

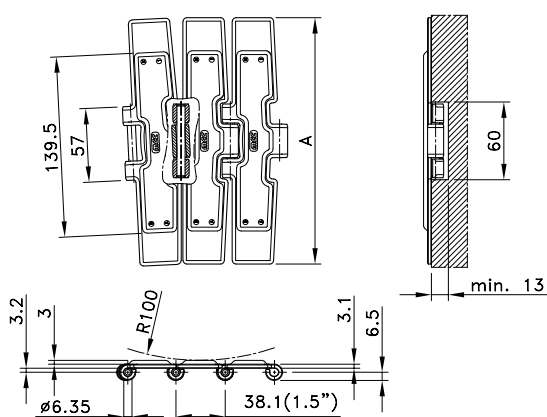

Chain Type	Code Number	Plate Width		Weight	Polished Hinge Eyes	Working Load (max.)
		A				
		mm	inch	kg/m		N
66-Series						
66M75RM	10375101	190.5	7.50	5.14	yes	7000

Standard length: 3.048 m - 10 feet (80 links).
Sideflex radius min. 750 mm.