

From standard low friction to specialized high-tech materials for very specific applications, the Rexnord plastic TableTop range is capable of delivering a wide range of solutions for conveyor applications for virtually any industry.

## Features

### High strength materials

For dry running and lubricated beverage applications and also for abrasive applications in glass works, special materials are available, offering high PV resistance or very low friction.

### Sliding properties

To ensure superior sliding properties, Rexnord uses a number of chain materials. In many cases these materials are especially defined for conveyor applications. All different materials have friction coefficients tailored to the intended application.

### Flatness

The design of the mould and the control of the production process take care of flatness values meeting the highest standards. Together with the optimum sliding properties, this will prevent tipping of the products conveyed.

### Standardization

In case handling a number of different chains are used. Standard chains (LF, HP) are used for general conveying of cases, trays or crates. High friction versions (Rubber Top, SuperGrip) are used for inclines and declines or on stopper belts. Version with rollers (LBP) are used in lines feeding palletizers in order to reduce the backline pressure and noise. The wide product range allows standardization of case handling conveyors, as a result of the same sprockets, track width, return rollers, return design, wearstrips and hinge width, also in co-operation with stainless steel (60 M 75 and 60 S 75). If plastic modular belts are used for straight running, sideflexing chainbelts are ideal for conveyors with 85 mm pitch; FGM 1040, FTM 1040 and FTM 1060 match with 1000- and 8500-series with 1005- and 7700-series. These chains feature a maximum support area and excellent transfers, even in small radii. For demanding applications FGM/FTM Magnetflex versions are recommended, whilst the FT tab versions are intended for less critical circumstances.

### 84 mm wide chains

Rexnord offers a complete range of both plastic and steel chains with 84 mm width, intended for the global beverage standard 85 mm pitch between the lanes of multi-lane conveyors. In plastic chains the straight running SHP84 and the sideflexing RHMP84 are companions, running on the same sprockets. The gap between the different tracks/lanes is minimized compared to the traditional 3.25" chains as well as the gap between the links of the chains, to offer superior product handling and minimize the risks of products falling.

### D-pins

SHP, RHMP, 1060, 1055, 879, 880 and 882 chains have D-style pins. Once assembled, the pin retention is done by means of geometrical fit instead of mechanical tension on the hinge eyes. This makes the chain less sensitive for attack by chemicals; it also allows (dis)assembly from both sides of the chains, reducing the chance of error.



## Plastic slatband chains are available in the following materials:

| Rexnord |                                                                                                                                                                                                                                                                                                                                                                                  |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LF      | Low Friction acetal (POM) and special blend of lubricants. This can reduce wear up to 15% over plain acetal; it is intended for high output applications at moderate to high speeds for general conveying.                                                                                                                                                                       |
| HP      | High Performance Advanced performance polymer alloy designed specifically for run dry applications; intended for dry running or reduced lubrication and high-speed applications.                                                                                                                                                                                                 |
| PSX     | Advanced performance polymer alloy designed specifically for run dry applications. PSX material is developed for high-speed conveying of glass bottles, PET bottles and cans in conditions where minimal or no external lubrication is present. Rexnord MatTop and TableTop chains in PSX material offer a long wear life with minimal dust forming in dry running applications. |
| BWX     | Polyamide composite to extend chain wear life in abrasive circumstances up to five times compared to acetal materials; to be used in glass handling applications where abrasive shards of glass can wear other plastic chain materials rapidly; it is also applicable when the chain is subjected to sand and dirt.                                                              |
| DKA     | Aramid reinforced acetal (POM) for wet or dry abrasive conditions, offering enhanced wear properties over plain acetals in combination with the low friction of a lubricated material. This material is available on request for a selected range of TableTop products.                                                                                                          |
| DRY-PT  | Material designed specifically for conveying of PET containers without need for external lubrication<br>Advanced performance polymer alloy designed specifically for run dry PET applications. It's not recommended for glass & can applications. Colour: Lime Green.                                                                                                            |
| GLA     | Especially designed material for glass manufacturing. Extremely suited for high abrasion environments, high humidity surroundings and for low to medium speed applications. Black toughened abrasion resistance Acetal. Can be easily cleaned with water.                                                                                                                        |


Anti-static and chemical resistant materials can be supplied for a limited number of chains. Please ask Customer Service for more details.

## Application

| Chain Material | Mass Handling | Inliner Standard | Inliner High-Speed | Abrasive Wet | Abrasive Dry |
|----------------|---------------|------------------|--------------------|--------------|--------------|
| LF             |               |                  |                    |              |              |
| HP             |               |                  |                    |              |              |
| PSX            |               |                  |                    |              |              |
| BWX            |               |                  |                    |              |              |
| DKA            |               |                  |                    |              |              |
| DRY-PT         |               |                  |                    |              |              |
| GLA            |               |                  |                    |              |              |

|          |             |
|----------|-------------|
| Optional | Best choice |
|----------|-------------|


## Straight Run Single Hinge

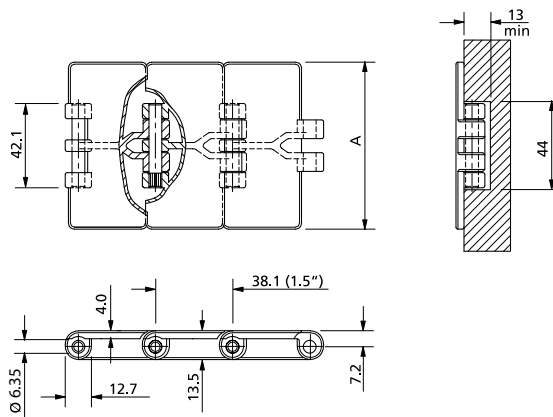

| Chain Type                             | Code Number | Plate Width |      | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Plate Thickness |
|----------------------------------------|-------------|-------------|------|--------|------------------------|--------------------------|-----------------|
|                                        |             | A           |      |        |                        |                          |                 |
|                                        |             | mm          | inch | kg/m   | N (21°C)               | mm                       | mm              |
| LF-Acetal                              |             |             |      |        |                        |                          |                 |
| LF820-2.5IN                            | 10373807    | 63.5        | 2.50 | 0.73   | 1230                   | 50                       | 4.0             |
| LF820-3.25IN                           | 10177685    | 82.5        | 3.25 | 0.83   |                        |                          |                 |
| LF820-3.3IN                            | 10139109    | 83.8        | 3.30 | 0.82   |                        |                          |                 |
| LF820-3.43IN                           | 10373793    | 87.0        | 3.43 | 0.85   |                        |                          |                 |
| LF820-3.5IN                            | 10177476    | 88.9        | 3.50 | 0.87   |                        |                          |                 |
| LF820-4IN                              | 10177687    | 101.6       | 4.00 | 0.95   |                        |                          |                 |
| LF820-4.5IN                            | 10177688    | 114.3       | 4.50 | 1.03   |                        |                          |                 |
| LF820-6IN                              | 10177689    | 152.4       | 6.00 | 1.25   |                        |                          |                 |
| LF820-7.5IN                            | 10177691    | 190.5       | 7.50 | 1.47   |                        |                          |                 |
| HP-Acetal                              |             |             |      |        |                        |                          |                 |
| HP820-3.25IN                           | 10144603    | 82.5        | 3.25 | 0.83   | 1230                   | 50                       | 4.0             |
| HP820-3.43IN                           | 10373794    | 87.0        | 3.43 | 0.85   |                        |                          |                 |
| HP820-3.5IN                            | 10373809    | 88.9        | 3.50 | 0.87   |                        |                          |                 |
| HP820-4IN                              | 10144606    | 101.6       | 4.00 | 0.95   |                        |                          |                 |
| HP820-4.5IN                            | 10144607    | 114.3       | 4.50 | 1.03   |                        |                          |                 |
| HP820-6IN                              | 10144608    | 152.4       | 6.00 | 1.25   |                        |                          |                 |
| HP820-7.5IN                            | 10144609    | 190.5       | 7.50 | 1.47   |                        |                          |                 |
| PSX Advanced Performance Polymer Alloy |             |             |      |        |                        |                          |                 |
| PSX820-3.25IN                          | 10291554    | 82.5        | 3.25 | 0.82   | 1230                   | 50                       | 4.0             |
| PSX820-3.3IN                           | 10375061    | 83.8        | 3.30 | 0.82   |                        |                          |                 |
| BWV-Polyamide Composite                |             |             |      |        |                        |                          |                 |
| BWV820-3.25IN                          | 10373860    | 82.5        | 3.25 | 0.83   | 1230                   | 50                       | 4.0             |
| BWV820-4.5IN                           | 10373857    | 114.3       | 4.50 | 1.03   |                        |                          |                 |
| BWV820-6IN                             | 10373813    | 152.4       | 6.00 | 1.25   |                        |                          |                 |
| BWV820-7.5IN                           | 10373863    | 190.5       | 7.50 | 1.47   |                        |                          |                 |

\* Pins made of black reinforced polyamide for non-magnetic or chemical applications. Ask costumer service for minimum order quantity.  
Standard length: 3.048 m - 10 feet (80 links).


## Straight Run Single Hinge Sideflex Joint Hinge

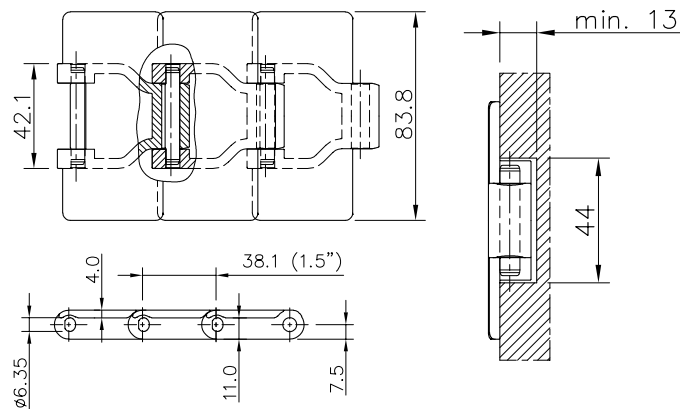

| Chain Type                             | Code Number | Plate Width |      | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Plate Thickness |
|----------------------------------------|-------------|-------------|------|--------|------------------------|--------------------------|-----------------|
|                                        |             | A           |      |        |                        |                          |                 |
|                                        |             | mm          | inch |        |                        |                          |                 |
| LF-Acetal                              |             |             |      |        |                        |                          |                 |
| LF_SHP-3.25IN                          | 10375041    | 82.5        | 3.25 | 0.94   | 2100                   | 50                       | 4.0             |
| LF_SHP-84MM                            | 10139106    | 83.8        | 3.30 | 0.94   |                        |                          |                 |
| PSX Advanced Performance Polymer Alloy |             |             |      |        |                        |                          |                 |
| PSX_SHP-3.25IN                         | 10375060    | 82.5        | 3.25 | 0.94   | 2100                   | 50                       | 4.0             |
| PSX_SHP-84MM                           | 10375059    | 83.8        | 3.30 | 0.94   |                        |                          |                 |

Standard length: 3.048 m - 10 feet (80 links).



## Straight Run Single Hinge With Thick Top Plate

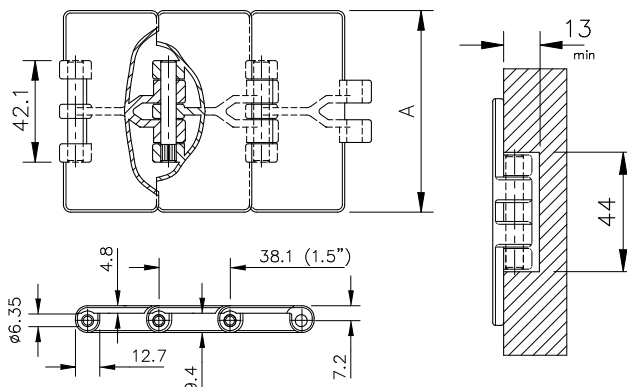

| Chain Type                             | Code Number | Plate Width |       | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Plate Thickness |
|----------------------------------------|-------------|-------------|-------|--------|------------------------|--------------------------|-----------------|
|                                        |             | A           |       |        |                        |                          |                 |
|                                        |             | mm          | inch  | kg/m   | N (21°C)               | mm                       | mm              |
| LF-Acetal                              |             |             |       |        |                        |                          |                 |
| LF831-3.25IN                           | 10177699    | 82.5        | 3.25  | 0.83   | 1230                   | 50                       | 4.8             |
| LF831-4.5IN                            | 10177701    | 4.50        | 114.3 | 1.03   |                        |                          |                 |
| LF831-7.5IN                            | 10177703    | 190.5       | 7.50  | 1.47   |                        |                          |                 |
| HP-Acetal                              |             |             |       |        |                        |                          |                 |
| HP831-3.25IN                           | 10144614    | 82.5        | 3.25  | 0.83   | 1230                   | 50                       | 4.8             |
| HP831-4.5IN                            | 10144615    | 4.50        | 114.3 | 1.03   |                        |                          |                 |
| HP831-7.5IN                            | 10144616    | 190.5       | 7.50  | 1.47   |                        |                          |                 |
| PSX Advanced Performance Polymer Alloy |             |             |       |        |                        |                          |                 |
| PSX831-3.25IN                          | 10292222    | 82.5        | 3.25  | 0.87   | 1230                   | 50                       | 4.8             |

Standard length: 3.048 m - 10 feet (80 links).


## Straight Run Double Hinge

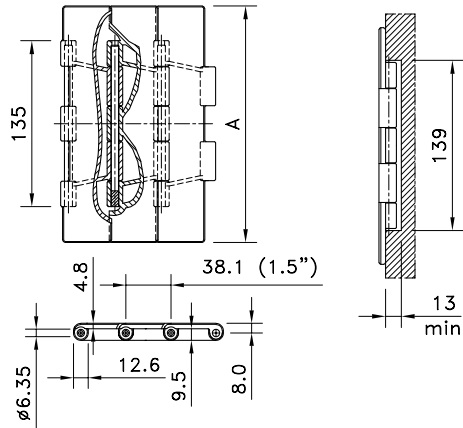

| Chain Type  | Code Number | Plate Width |       | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Plate Thickness |
|-------------|-------------|-------------|-------|--------|------------------------|--------------------------|-----------------|
|             |             | A           |       |        |                        |                          |                 |
|             |             | mm          | inch  | kg/m   | N (21°C)               | mm                       | mm              |
| LF-Acetal   |             |             |       |        |                        |                          |                 |
| LF821-7.5IN | 10177696    | 190.5       | 7.50  | 2.50   | 2680                   | 50                       | 4.8             |
| LF821-10IN  | 10177694    | 254.0       | 10.00 | 2.95   |                        |                          |                 |
| LF821-12IN  | 10177695    | 304.8       | 12.00 | 3.25   |                        |                          |                 |
| HP-Acetal   |             |             |       |        |                        |                          |                 |
| HP821-7.5IN | 10144619    | 190.5       | 7.50  | 2.50   | 2680                   | 50                       | 4.8             |
| HP821-10IN  | 10144620    | 254.0       | 10.00 | 2.95   |                        |                          |                 |
| HP821-12IN  | 10144621    | 304.8       | 12.00 | 3.25   |                        |                          |                 |



Standard length: 3.048 m - 10 feet (80 links).

## Straight Run Heavy Duty

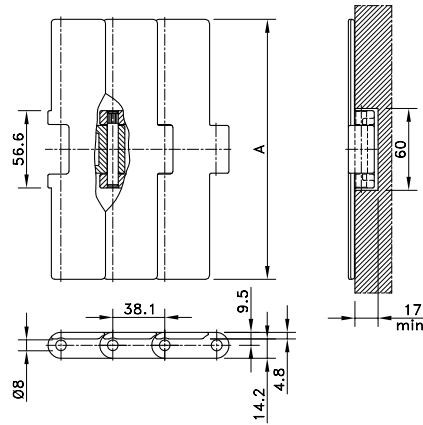

| Chain Type   | Code Number | Plate Width |       | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Plate Thickness |
|--------------|-------------|-------------|-------|--------|------------------------|--------------------------|-----------------|
|              |             | A           |       |        |                        |                          |                 |
|              |             | mm          | inch  | kg/m   | N (21°C)               | mm                       | mm              |
| LF-Acetal    |             |             |       |        |                        |                          |                 |
| LF_HDS-7.5IN | 10139126    | 190.5       | 7.50  | 2.16   | 3830                   | 50                       | 4.8             |
| LF_HDS-10IN  | 10139127    | 254.0       | 10.00 | 2.42   |                        |                          |                 |
| LF_HDS-12IN  | 10375135    | 304.8       | 12.00 | 2.69   |                        |                          |                 |


Standard length: 3.048 m - 10 feet (80 links).

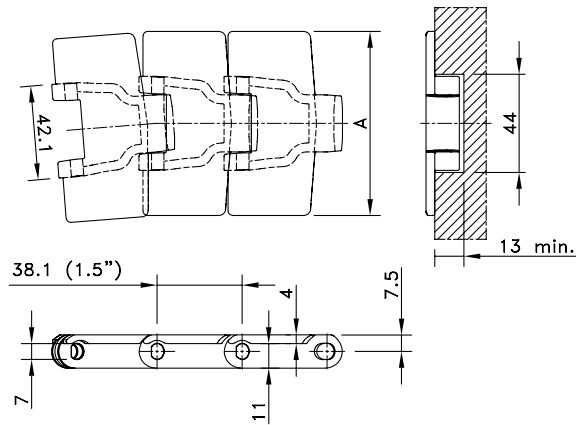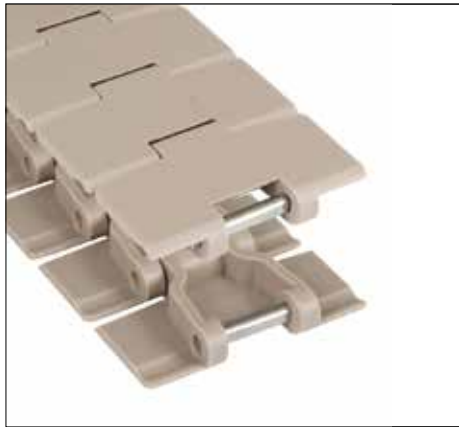

| Chain Type                             | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|----------------------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                                        |             | A           |      |        |                       |                     |                       |                 |
|                                        |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal                              |             |             |      |        |                       |                     |                       |                 |
| LF_RHMP-3.25IN                         | 10144173    | 82.5        | 3.25 | 0.82   | 500                   | 2100                | 50                    | 4.0             |
| LF_RHMP-84MM                           | 10144177    | 83.8        | 3.30 | 0.82   |                       |                     |                       |                 |
| LF_RHM-3.5IN                           | 10374880    | 88.9        | 3.50 | 1.10   | 457                   |                     |                       |                 |
| LF_RHM-4.5IN                           | 10144181    | 114.3       | 4.50 | 1.16   |                       |                     |                       |                 |
| HP-Acetal                              |             |             |      |        |                       |                     |                       |                 |
| HP_RHMP-3.25IN                         | 10144179    | 82.5        | 3.25 | 0.82   | 500                   | 2100                | 50                    | 4.0             |
| PSX Advanced Performance Polymer Alloy |             |             |      |        |                       |                     |                       |                 |
| PSX_RHMP-3.25IN                        | 10374878    | 82.5        | 3.25 | 0.82   | 500                   | 2100                | 50                    | 4.0             |
| PSX_RHMP-84MM                          | 10354767    | 83.8        | 3.30 | 0.82   |                       |                     |                       |                 |
| BWX-Polyamide Composite                |             |             |      |        |                       |                     |                       |                 |
| BWX_RHMP-84MM                          | 10374879    | 83.8        | 3.30 | 0.82   | 500                   | 2100                | 50                    | 4.0             |

Standard length: 3.048 m - 10 feet (80 links).

## Magnetflex® With Thick Top Plate

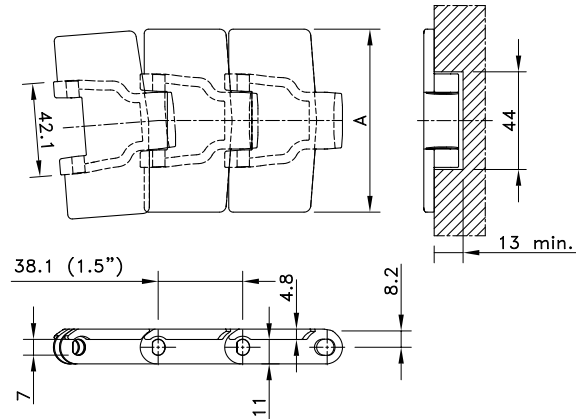


| Chain Type                             | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|----------------------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                                        |             | A           |      |        |                       |                     |                       |                 |
|                                        |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal                              |             |             |      |        |                       |                     |                       |                 |
| LF_RHMDP-3.25IN                        | 10144175    | 82.5        | 3.25 | 1.08   | 500                   | 2100                | 50                    | 4.8             |
| LF_RHMD-4.5IN                          | 10144182    | 114.3       | 4.50 | 1.26   | 457                   |                     |                       |                 |
| PSX Advanced Performance Polymer Alloy |             |             |      |        |                       |                     |                       |                 |
| PSX_RHMDP-3.25IN                       | 10374877    | 82.5        | 3.25 | 0.87   | 500                   | 2100                | 50                    | 4.8             |

Standard length: 3.048 m - 10 feet (80 links).




## Magnetflex® Heavy Duty

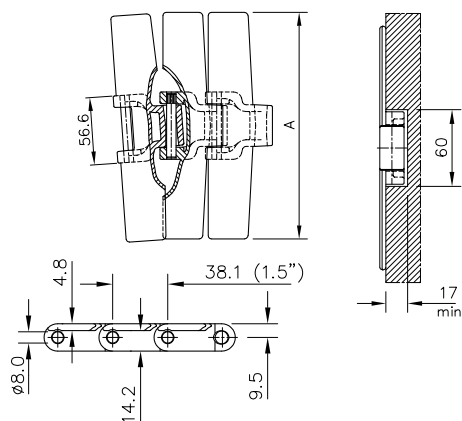

| Chain Type    | Code Number | Plate Width |       | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Sideflex Radius<br>(min) | Plate Thickness |
|---------------|-------------|-------------|-------|--------|------------------------|--------------------------|--------------------------|-----------------|
|               |             | A           |       |        |                        |                          |                          |                 |
|               |             | mm          | inch  | kg/m   | N (21°C)               | mm                       | mm                       | mm              |
| LF-Acetal     |             |             |       |        |                        |                          |                          |                 |
| LF_HDFM-7.5IN | 10139118    | 190.5       | 7.50  | 2.16   | 3830                   | 50                       | 610                      | 4.8             |
| LF_HDFM-10IN  | 10139119    | 254.0       | 10.00 | 2.42   |                        |                          |                          |                 |
| LF_HDFM-12IN  | 10375019    | 304.8       | 12.00 | 2.69   |                        |                          |                          |                 |

Standard length: 3.048 m - 10 feet (80 links).


## Standard Radius Single Hinge Bevel

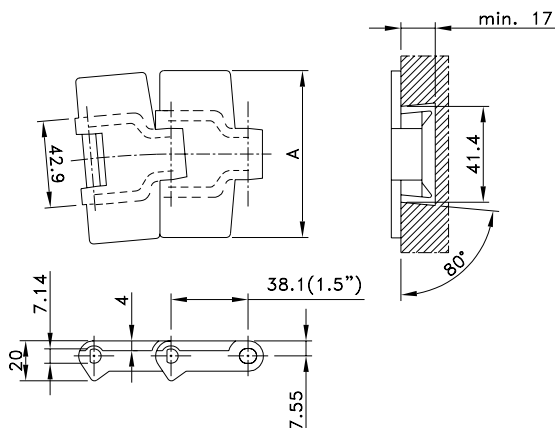

| Chain Type              | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|-------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                         |             | A           |      |        |                       |                     |                       |                 |
|                         |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal               |             |             |      |        |                       |                     |                       |                 |
| LF880B-3.25IN           | 10177732    | 82.5        | 3.25 | 0.89   | 457                   | 2100                | 40                    | 4.0             |
| LF880B-4.5IN            | 10177734    | 114.3       | 4.50 | 1.04   |                       |                     |                       |                 |
| BWX-Polyamide Composite |             |             |      |        |                       |                     |                       |                 |
| BWX880B-3.25IN          | 10374143    | 82.5        | 3.25 | 0.89   | 457                   | 2100                | 40                    | 4.0             |
| BWX880B-4.5IN           | 10374137    | 114.3       | 4.50 | 1.04   |                       |                     |                       |                 |

Standard length: 3.048 m - 10 feet (80 links).

Standard Radius Single Hinge Bevel With Thick Top Plate

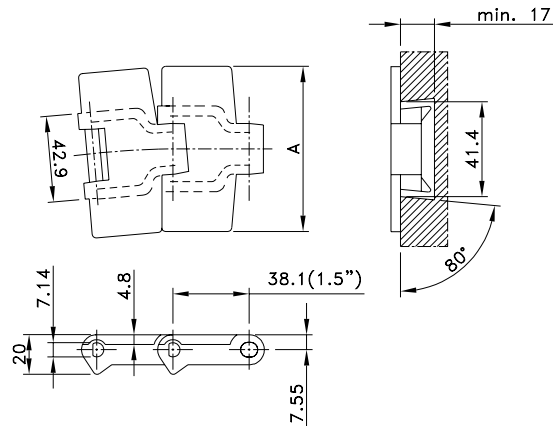


| Chain Type    | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|---------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|               |             | A           |      |        |                       |                     |                       |                 |
|               |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal     |             |             |      |        |                       |                     |                       |                 |
| LF879B-3.25IN | 10177724    | 82.5        | 3.25 | 0.89   | 610                   | 2100                | 40                    | 4.8             |
| LF879B-4.5IN  | 10177725    | 114.3       | 4.50 | 1.04   |                       |                     |                       |                 |

Standard length: 3.048 m - 10 feet (80 links).




## Standard Radius Single Hinge Tab

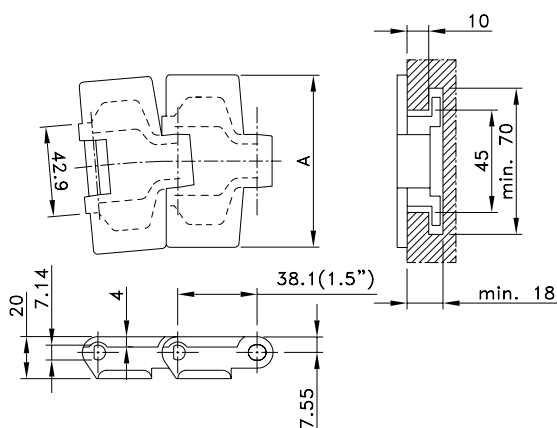

| Chain Type                             | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|----------------------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                                        |             | A           |      |        |                       |                     |                       |                 |
|                                        |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal                              |             |             |      |        |                       |                     |                       |                 |
| LF880TAB-3.25IN                        | 10177740    | 82.5        | 3.25 | 0.94   | 457                   | 2100                | 40                    | 4.0             |
| LF880TAB-3.3IN                         | 10375008    | 83.8        | 3.3  | 1.01   |                       |                     |                       |                 |
| LF880TAB-3.43IN                        | 10374085    | 87.0        | 3.43 | 1.01   | 500                   |                     |                       |                 |
| LF880TAB-3.5IN                         | 10144724    | 88.9        | 3.50 | 1.01   |                       |                     |                       |                 |
| LF880TAB-4.5IN                         | 10177743    | 114.3       | 4.50 | 1.08   |                       |                     |                       |                 |
| LF880TAB-3.25IN SS316                  | 10374084    | 82.5        | 3.25 | 0.94   | 457                   | 2100                |                       |                 |
| LF880TAB-4.5IN PA-PIN                  | 10374084    | 114.3       | 4.50 | 0.91   | 500                   | 1050                |                       |                 |
| HP-Acetal                              |             |             |      |        |                       |                     |                       |                 |
| HP880TAB-3.25IN                        | 10144626    | 82.5        | 3.25 | 0.94   | 457                   | 2100                | 40                    | 4.0             |
| HP880TAB-3.25IN SS316                  | 10373670    | 82.5        | 3.25 | 0.94   |                       |                     |                       |                 |
| HP880TAB-4.5IN                         | 10144627    | 114.3       | 4.50 | 1.08   | 500                   |                     |                       |                 |
| HP880TAB-4.5IN SS316                   | 10373669    | 114.3       | 4.50 | 1.08   |                       |                     |                       |                 |
| BWX-Polyamide Composite                |             |             |      |        |                       |                     |                       |                 |
| BWX880TAB-3.25IN                       | 10374144    | 82.5        | 3.25 | 0.94   | 457                   | 2100                | 40                    | 4.0             |
| BWX880TAB-4.5IN                        | 10374133    | 114.3       | 4.50 | 1.08   | 500                   |                     |                       |                 |
| PSX Advanced Performance Polymer Alloy |             |             |      |        |                       |                     |                       |                 |
| PSX880TAB-3.25IN                       | 10288394    | 82.5        | 3.25 | 0.94   | 457                   | 2100                | 40                    | 4.0             |
| PSX880TAB-4.5IN                        | 10288395    | 114.3       | 4.50 | 1.08   |                       |                     |                       |                 |
| PSX880TAB-4.5IN SS                     | 10374097    | 114.3       | 4.50 | 1.08   |                       |                     |                       |                 |

\* Pins made of black reinforced polyamide for non-magnetic or chemical applications. Minimum order quantity 30.48 mtr - 100 feet.  
Standard length: 3.048 m - 10 feet (80 links).

Standard Radius Single Hinge Tab With Thick Top Plate

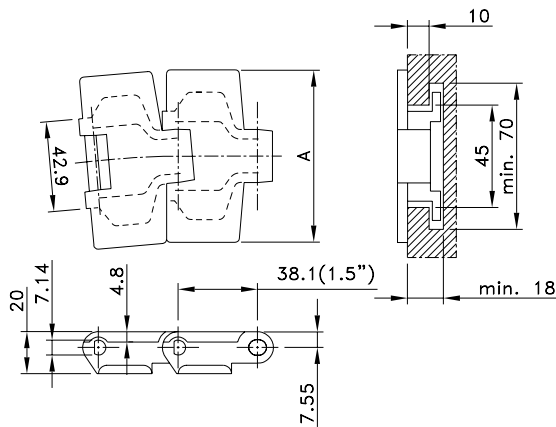


| Chain Type      | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|-----------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                 |             | A           |      |        |                       |                     |                       |                 |
|                 |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal       |             |             |      |        |                       |                     |                       |                 |
| LF879TAB-3.25IN | 10177726    | 82.5        | 3.25 | 0.98   | 457                   | 2100                | 40                    | 4.8             |
| LF879TAB-4.5IN  | 10177729    | 114.3       | 4.50 | 1.14   | 610                   |                     |                       |                 |

Standard length: 3.048 m - 10 feet (80 links).  
\*Minimum order quantity 30.48 m - 100 feet.





## Small Radius Single Hinge Tab

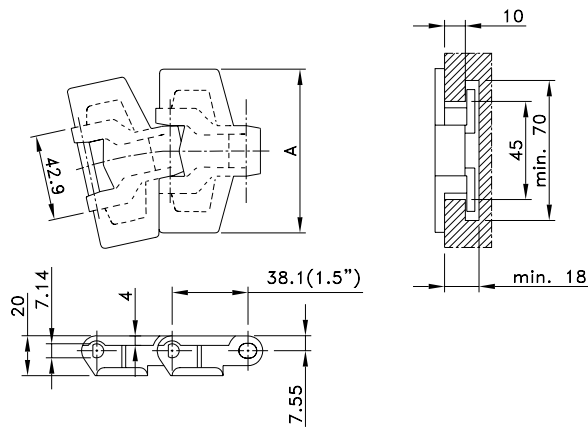

| Chain Type         | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                    |             | A           |      |        |                       |                     |                       |                 |
|                    |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal          |             |             |      |        |                       |                     |                       |                 |
| LF880TAB BO-3.25IN | 10144810    | 82.5        | 3.25 | 0.96   | 190                   | 1680                | 40                    | 4.0             |
| LF880TAB BO-4.5IN  | 10144811    | 114.3       | 4.50 | 1.11   |                       |                     |                       |                 |
| HP-Acetal          |             |             |      |        |                       |                     |                       |                 |
| HP880TAB BO-3.25IN | 10144923    | 82.5        | 3.25 | 0.96   | 190                   | 1680                | 40                    | 4.0             |
| HP880TAB BO-4.5IN  | 10144924    | 114.3       | 4.50 | 1.11   |                       |                     |                       |                 |

Standard length: 3.048 m - 10 feet (80 links).

## Small Radius Single Hinge Tab With Thick Top Plate

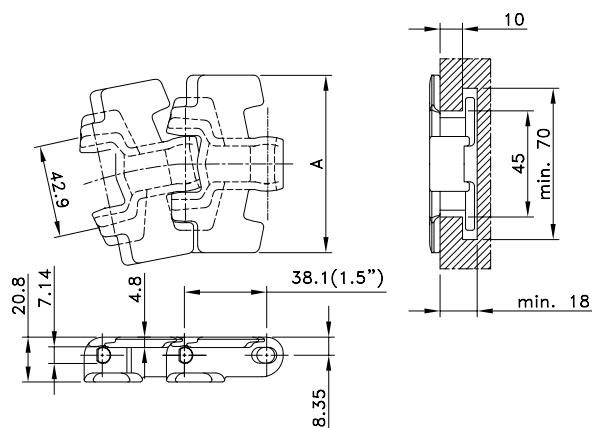


| Chain Type              | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|-------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                         |             | A           |      |        |                       |                     |                       |                 |
|                         |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal               |             |             |      |        |                       |                     |                       |                 |
| LF879TAB BO-3.25IN      | 10177490    | 82.5        | 3.25 | 1.08   | 190                   | 2100                | 40                    | 4.8             |
| LF879TAB BO-4.5IN       | 10177491    | 114.3       | 4.50 | 1.20   |                       |                     |                       |                 |
| HP-Acetal               |             |             |      |        |                       |                     |                       |                 |
| *HP879TAB BO-3.25IN     | 10373747    | 82.5        | 3.25 | 1.08   | 190                   | 2100                | 40                    | 4.8             |
| HP879TAB BO-4.5IN       | 10177493    | 114.3       | 4.50 | 1.20   |                       |                     |                       |                 |
| BWX-Polyamide Composite |             |             |      |        |                       |                     |                       |                 |
| *BWX879TAB BO-3.25IN    | 10373702    | 82.5        | 3.25 | 1.08   | 190                   | 2100                | 40                    | 4.8             |

Standard length: 3.048 m - 10 feet (80 links).

\* Minimum order quantity 30.48 m - 100 feet.

## Sideflex Tab Heavy Duty

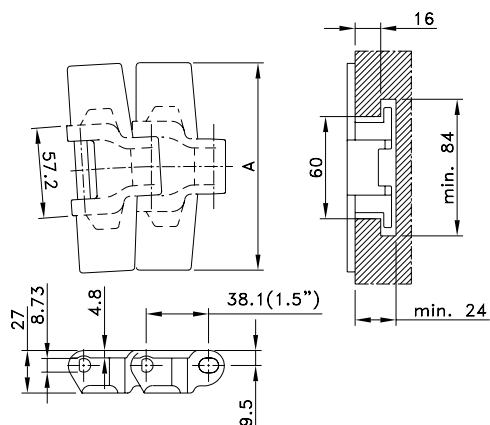

| Chain Type       | Code Number | Plate Width |       | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|------------------|-------------|-------------|-------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                  |             | A           |       |        |                       |                     |                       |                 |
|                  |             | mm          | inch  | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal        |             |             |       |        |                       |                     |                       |                 |
| LF882TAB-3.25IN* | 10144749    | 82.5        | 3.25  | 1.86   | 610                   | 3830                | 40                    | 4.8             |
| LF882TAB-4.5IN   | 10177754    | 114.3       | 4.50  | 1.98   |                       |                     |                       |                 |
| LF882TAB-7.5IN   | 10177755    | 190.5       | 7.50  | 2.43   |                       |                     |                       |                 |
| LF882TAB-10IN    | 10177756    | 254.0       | 10.00 | 2.87   |                       |                     |                       |                 |
| LF882TAB-12IN    | 10177757    | 304.8       | 12.00 | 3.41   |                       |                     |                       |                 |


Standard length: 3.048 m – 10 feet (80 links).

\* Minimum order quantity 30.48 m – 100 feet.

## Notes

[illegible]

## Sideflex Tab With Flights

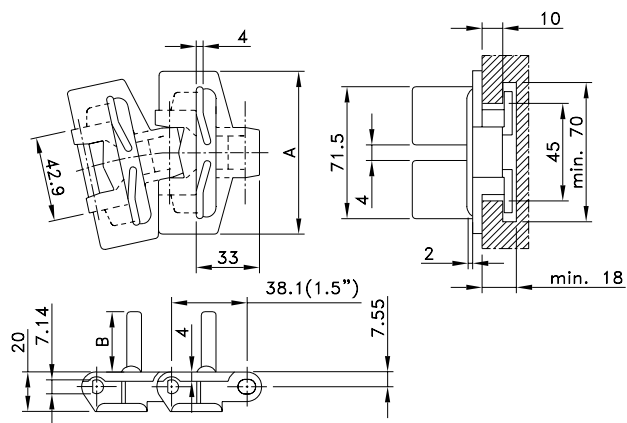

| Chain Type                   | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|------------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                              |             | A           |      |        |                       |                     |                       |                 |
|                              |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal                    |             |             |      |        |                       |                     |                       |                 |
| LF880TAB BO-3.25IN F25MM*    | 10373674    | 82.5        | 3.25 | 0.96   | 190                   | 1680                | 40                    | 4.0             |
| LF880TAB BO-3.25IN F39 T1P** | 10374026    | 82.5        | 3.25 | 0.96   |                       |                     |                       |                 |

\* Height of flight (B) 25 mm.

\*\* Height of flight (B) 39 mm.



Standard length: 3.048 m - 10 feet (80 links).

As a standard flights on every second link; other patterns are possible.

Minimum order quantity 30.48 m – 100 feet.



## Straight Run Single Hinge

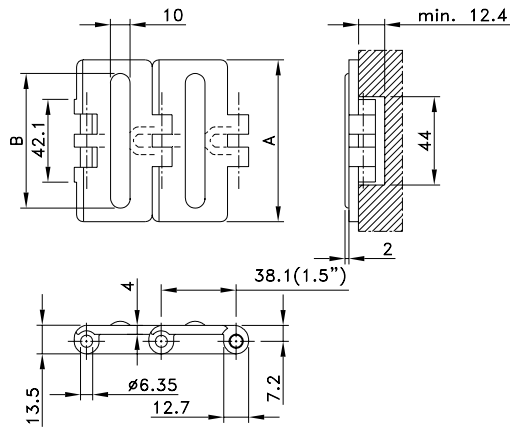

| Chain Type          | Code Number | Plate Width |      | Weight | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|---------------------|-------------|-------------|------|--------|---------------------|-----------------------|-----------------|
|                     |             | A           |      |        |                     |                       |                 |
|                     |             | mm          | inch | kg/m   | N (21°C)            | mm                    | mm              |
| LF-Acetal           |             |             |      |        |                     |                       |                 |
| LF820 RT-3.25IN D60 | 10373800    | 82.5        | 3.25 | 0.83   | 1230                | 40                    | 4.0             |
| LF820RT-4IN D60     | 10373828    | 101.6       | 4.00 | 0.95   |                     |                       |                 |
| LF820 RT-4.5IN D60  | 10373868    | 114.3       | 4.50 | 1.03   |                     |                       |                 |
| LF820 RT-6IN D60    | 10373829    | 152.4       | 6.00 | 1.25   |                     |                       |                 |




Standard length: 3.048 m - 10 feet (80 links).

The width (B) of the rubber varies per chain type:

65.0, 84, 96 and 135.0 for respectively HFP 820-K325, HFP 820-K400, HFP 820-K450 and HFP 820-K600.

Minimum order quantity 30.48 m – 100 feet.

## Straight Run Double Hinge Rubber Pushers

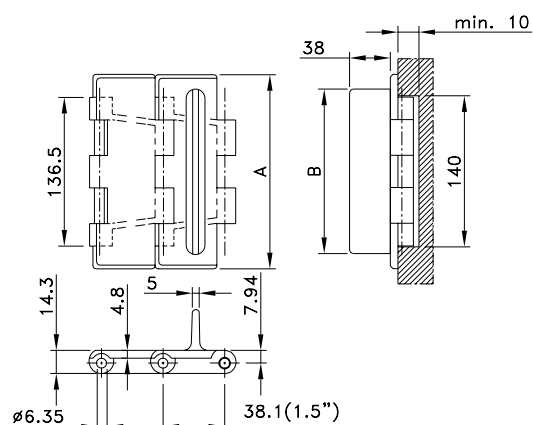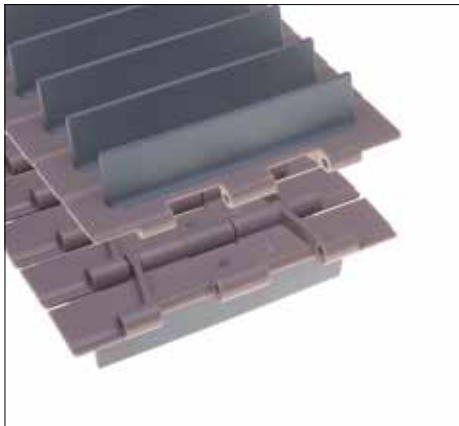


| Chain Type              | Code Number | Plate Width |       | Weight | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|-------------------------|-------------|-------------|-------|--------|---------------------|-----------------------|-----------------|
|                         |             | A           |       |        |                     |                       |                 |
|                         |             | mm          | inch  | kg/m   | N (21°C)            | mm                    | mm              |
| LF-Acetal               |             |             |       |        |                     |                       |                 |
| LF821 RT-12IN D90 F38MM | 10373678*   | 304.8       | 12.00 | 3.17   | 2680                | 70                    | 4.8             |

Standard length: 3.048 m – 10 feet (80 links).

The width (B) of the pushers varies per chain type:

\* Minimum order quantity 30.48 m – 100 feet.

## Straight Run Double Hinge Supergrip

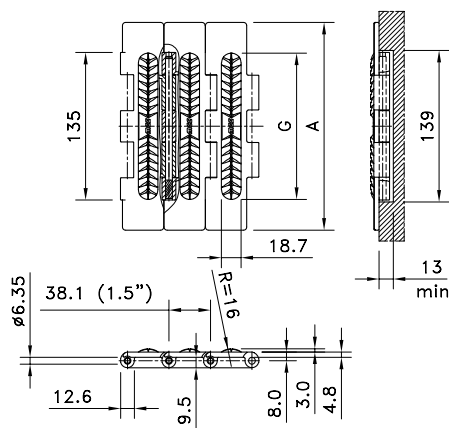


| Chain Type       | Code Number | Plate Width |       | Weight | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|------------------|-------------|-------------|-------|--------|---------------------|-----------------------|-----------------|
|                  |             | A           |       |        |                     |                       |                 |
|                  |             | mm          | inch  | kg/m   | N (21°C)            | mm                    | mm              |
| XLA-Acetal       |             |             |       |        |                     |                       |                 |
| XLA_SWH SG-7.5IN | 10144156    | 190.5       | 7.50  | 2.29   | 2680                | 50                    | 4.8             |
| XLA_SWH SG-10IN  | 10374884    | 254.0       | 10.00 | 2.67   |                     |                       |                 |
| XLA_SWH SG-12IN  | 10144157    | 304.8       | 12.00 | 3.06   |                     |                       |                 |

Standard length: 3.048 m - 10 feet (80 links).

The width (G) of the moulded-in rubber top varies per chain type:

134, 192.1 and 252.5 mm for respectively SWH 750 SG, SWH 1000 SG and SWH 1200 SG.

## Straight Run Double Hinge

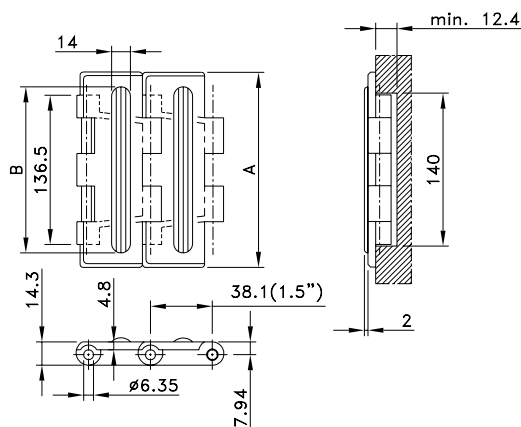

| Chain Type               | Code Number | Plate Width A |       | Weight | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------------|-------------|---------------|-------|--------|---------------------|-----------------------|-----------------|
|                          |             | mm            | inch  | kg/m   | N (21°C)            | mm                    | mm              |
| LF-Acetal                |             |               |       |        |                     |                       |                 |
| LF821 SG-7.5IN D60 T1P   | 10383883*   | 190.5         | 7.50  | 2.50   | 2680                | 40                    | 4.8             |
| LF821 SG-10IN 1SGD60 T1P | 10526960*   | 254.0         | 10.00 | 2.95   |                     |                       |                 |
| LF821 SG-12IN 1SGD60 T1P | 10526961*   | 304.8         | 12.00 | 3.25   |                     |                       |                 |



Standard length: 3.048 m - 10 feet (80 links).

The width (B) of the rubber varies per chain type:

132, 195 and 245 mm for respectively HFP 821-K750, HFP 821-K1000 and HFP 821-K1200.

\* Minimum order quantity 30.48 m - 100 feet.

## Straight Run Heavy Duty Supergrip

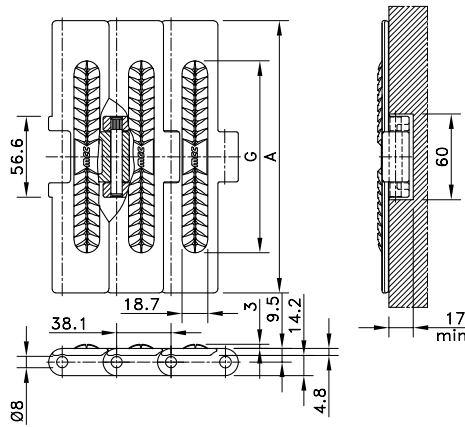



| Chain Type       | Code Number | Plate Width |       | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Plate Thickness |
|------------------|-------------|-------------|-------|--------|------------------------|--------------------------|-----------------|
|                  |             | A           |       |        |                        |                          |                 |
|                  |             | mm          | inch  | kg/m   | N (21°C)               | mm                       | mm              |
| XLA-Acetal       |             |             |       |        |                        |                          |                 |
| XLA_HDS SG-4.5IN | 10374886    | 114.3       | 4.50  | 1.70   | 2700                   | 50                       | 4.8             |
| XLA_HDS SG-7.5IN | 10144159    | 190.5       | 7.50  | 2.10   |                        |                          |                 |
| XLA_HDS SG-10IN  | 10374887    | 254.0       | 10.00 | 2.42   |                        |                          |                 |
| XLA_HDS SG-12IN  | 10144160    | 304.8       | 12.00 | 2.69   |                        |                          |                 |

Standard length: 3.048 m - 10 feet (80 links).

The width (G) of the moulded-in rubber top varies per chain type:

92, 134, 192 and 252.5 mm for respectively HDS 450 SG, HDS 750 SG, HDS 1000 SG and HDS 1200 SG.

## Magnetflex® Heavy Duty Supergrip

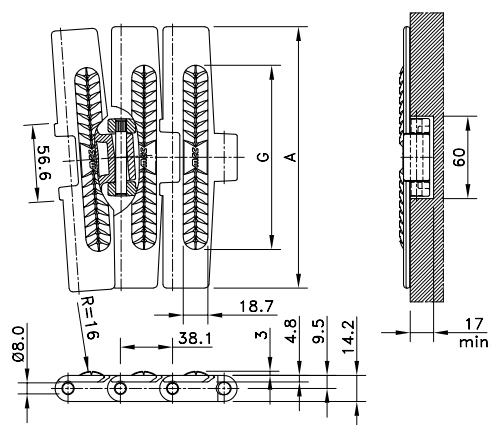



| Chain Type        | Code Number | Plate Width |       | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|-------------------|-------------|-------------|-------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                   |             | A           |       |        |                       |                     |                       |                 |
|                   |             | mm          | inch  |        |                       |                     |                       |                 |
| XLA-Acetal        |             |             |       |        |                       |                     |                       |                 |
| XLA_HDFM SG-7.5IN | 10144158    | 190.5       | 7.50  | 2.10   | 610                   | 2700                | 50                    | 4.8             |
| XLA_HDFM SG-10IN  | 10356786    | 254.0       | 10.00 | 2.42   |                       |                     |                       |                 |
| XLA_HDFM SG-12IN  | 10374885    | 304.8       | 12.00 | 2.69   |                       |                     |                       |                 |

Standard length: 3.048 m - 10 feet (80 links).

The width (G) of the moulded-in rubber top varies per chain type:

134, 192 and 251 mm for respectively HDFM 750 SG, HDFM 1000 SG and HDFM 1200 SG.

## Standard Radius Heavy Duty Single Hinge Tab

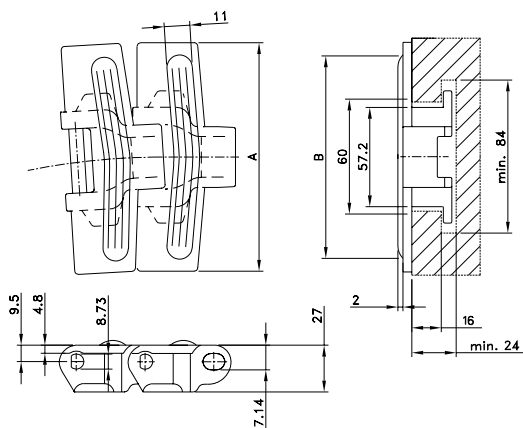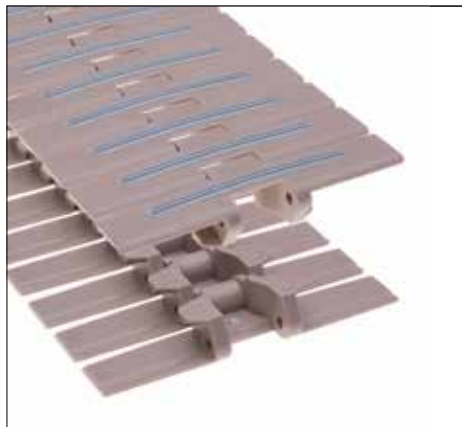

| Chain Type               | Code Number | Plate Width |       | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------------|-------------|-------------|-------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                          |             | A           |       |        |                       |                     |                       |                 |
|                          |             | mm          | inch  | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal                |             |             |       |        |                       |                     |                       |                 |
| LF882TAB SG-7.5IN D60    | 10374032    | 190.5       | 7.50  | 2.43   | 610                   | 3830                | 40                    | 4.8             |
| LF882TAB SG-10IN D60     | 10374037    | 254.0       | 10.00 | 2.87   |                       |                     |                       |                 |
| LF882TAB SG-12IN D60 T1P | 10374033    | 304.8       | 12.00 | 3.41   |                       |                     |                       |                 |

Standard length: 3.048 m - 10 feet (80 links).


The width (B) of the rubber varies per chain type:

132, 195 and 246 mm for respectively HFP 882 TAB-K750, HFP 882 TAB-K1000 and HFP 882 TAB-K1200.

Other rubber patterns and materials are possible.

Minimum order quantity 30.48 m - 100 feet.

## Standard Radius Single Hinge Tab

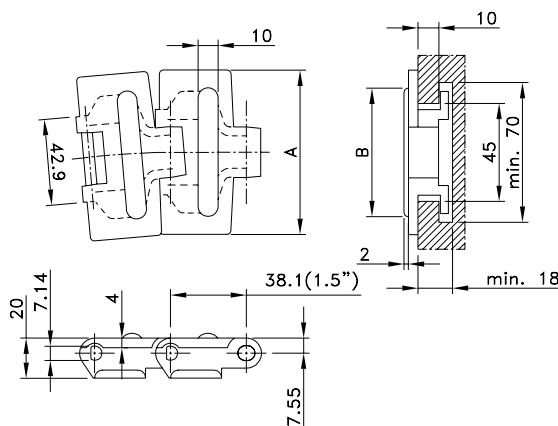

| Chain Type                 | Code Number | Plate Width A |      | Weight<br>kg/m | Sideflex Radius (min)<br>mm | Working Load (max.)<br>N (21°C) | Backflex Radius (min)<br>mm | Plate Thickness<br>mm |
|----------------------------|-------------|---------------|------|----------------|-----------------------------|---------------------------------|-----------------------------|-----------------------|
|                            |             | mm            | inch |                |                             |                                 |                             |                       |
| LF-Acetal                  |             |               |      |                |                             |                                 |                             |                       |
| LF880TAB RT-3.25IN D60 T1P | 10481478    | 82.5          | 3.25 | 0.94           | 457                         | 2100                            | 40                          | 4.0                   |
| LF880TAB RT-4.5IN SD60 T1P | 10301143    | 114.3         | 4.50 | 1.08           | 500                         |                                 |                             |                       |

Standard length: 3.048 m - 10 feet (80 links).


The width (B) of the rubber varies per chain type:

65 and 95 mm for respectively HFP 880 TAB-K325 and HFP 880 TAB-K450.

Other rubber patterns and materials are possible.

\* Minimum order quantity 30.48 m - 100 feet.

## Small Radius Single Hinge Tab

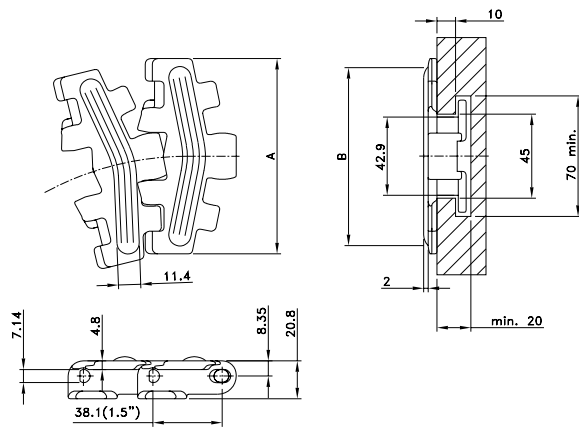

| Chain Type | Code Number | Plate Width A |      | Weight<br>kg/m | Working Load<br>(max.)<br>N (21°C) | Backflex Radius<br>(min)<br>mm | Sideflex Radius<br>(min)<br>mm | Plate Thickness<br>mm |
|------------|-------------|---------------|------|----------------|------------------------------------|--------------------------------|--------------------------------|-----------------------|
|            |             | mm            | inch |                |                                    |                                |                                |                       |

### LF-Acetal

|                               |          |       |      |      |      |    |     |     |
|-------------------------------|----------|-------|------|------|------|----|-----|-----|
| LF879TAB BO RT-3.25IN D60 T1P | 10373744 | 82.5  | 3.25 | 1.08 | 2100 | 40 | 190 | 4.8 |
| LF879TAB BO RT-4.5IN D60 T1P  | 10177492 | 114.3 | 4.50 | 1.20 |      |    |     |     |


Standard length: 3.048 m - 10 feet (80 links).

The width (B) of the rubber varies per chain type:

71 and 102 mm for respectively HFP 879 BO-K325 and HFP 879 BO-K450.

Minimum order quantity 30.48 m - 100 feet.

## Small Radius Single Hinge Tab

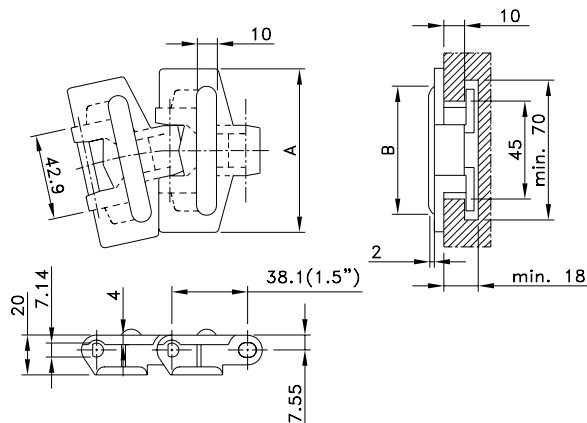

| Chain Type | Code Number | Plate Width A |      | Weight<br>kg/m | Working Load<br>(max.)<br>N (21°C) | Backflex Radius<br>(min)<br>mm | Sideflex Radius<br>(min)<br>mm | Plate Thickness<br>mm |
|------------|-------------|---------------|------|----------------|------------------------------------|--------------------------------|--------------------------------|-----------------------|
|            |             | mm            | inch |                |                                    |                                |                                |                       |

### LF-Acetal

|                           |          |      |      |      |      |    |     |     |
|---------------------------|----------|------|------|------|------|----|-----|-----|
| LF880TAB BO RT-3.25IN D60 | 10373675 | 82.5 | 3.25 | 0.96 | 1680 | 40 | 190 | 4.0 |
|---------------------------|----------|------|------|------|------|----|-----|-----|


Standard length: 3.048 m - 10 feet (80 links).

The width (B) of the rubber is 65 mm.

Other rubber patterns and materials are possible.

\* Minimum order quantity 30.48 m - 100 feet.


Straight Run Single Hinge LBP

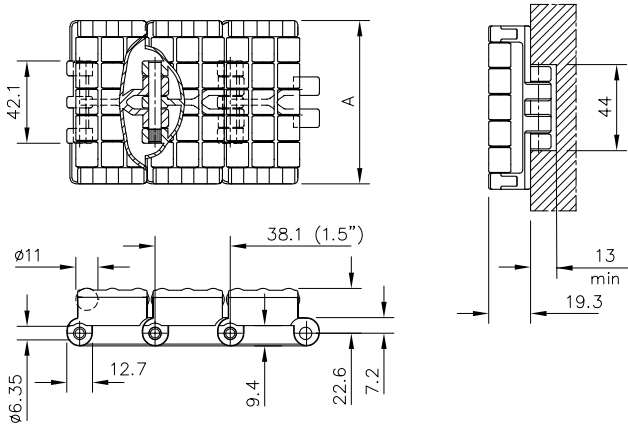

| Chain Type         | Code Number | Plate Width |      | Weight | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------|-------------|-------------|------|--------|---------------------|-----------------------|-----------------|
|                    |             | A           |      |        |                     |                       |                 |
|                    |             | mm          | inch |        |                     |                       |                 |
| XLA-Acetal         |             |             |      |        |                     |                       |                 |
| XLA_SHD LBP-3.25IN | 10139137    | 82.5        | 3.25 | 2.20   | 1230                | 400                   | 4.8             |

Standard length: 1.524 m - 5 feet (40 links).

Straight Run Double Hinge LBP

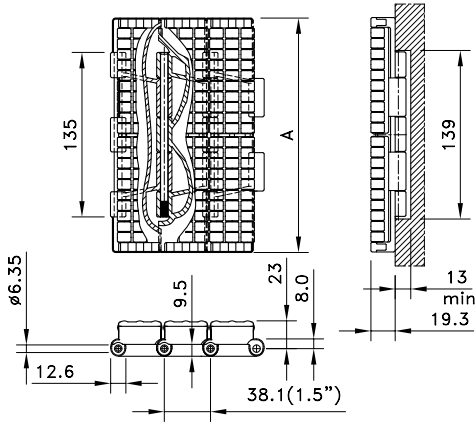


| Chain Type        | Code Number | Plate Width |       | Weight | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|-------------------|-------------|-------------|-------|--------|---------------------|-----------------------|-----------------|
|                   |             | A           |       |        |                     |                       |                 |
|                   |             | mm          | inch  | kg/m   | N (21°C)            | mm                    | mm              |
| XLA-Acetal        |             |             |       |        |                     |                       |                 |
| XLA_SWH LBP-7.5IN | 10139134    | 190.5       | 7.50  | 5.30   | 2680                | 300                   | 4.8             |
| XLA_SWH LBP-10IN  | 10139136    | 254.0       | 10.00 | 6.60   |                     |                       |                 |
| XLA_SWH LBP-12IN  | 10139135    | 304.8       | 12.00 | 7.85   |                     |                       |                 |

Standard length: 1.524 m - 5 feet (40 links).




## Straight Run Heavy Duty LBP

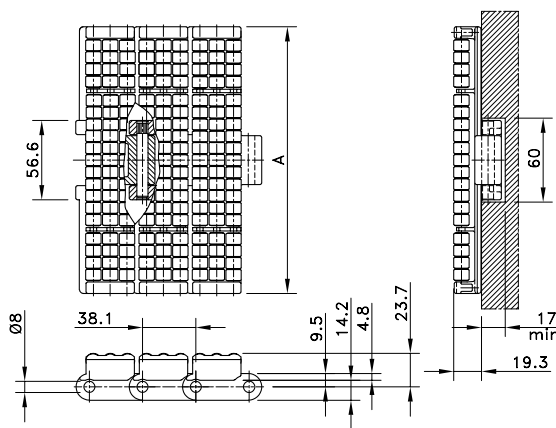

| Chain Type        | Code Number | Plate Width |      | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Plate Thickness |
|-------------------|-------------|-------------|------|--------|------------------------|--------------------------|-----------------|
|                   |             | A           |      |        |                        |                          |                 |
|                   |             | mm          | inch | kg/m   | N (21°C)               | mm                       | mm              |
| XLA-Acetal        |             |             |      |        |                        |                          |                 |
| XLA_HDS LBP-7.5IN | 10139131    | 190.5       | 7.50 | 4.28   | 3830                   | 200                      | 4.8             |

Standard length: 1.524 m - 5 feet (40 links).

## Straight Run Heavy Duty LBP

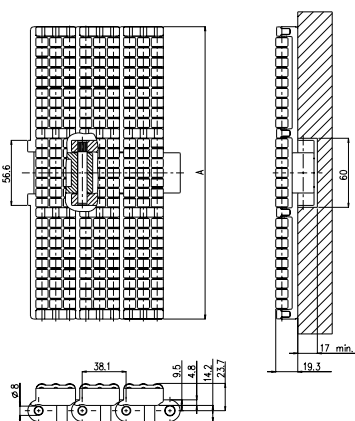


| Chain Type       | Code Number | Plate Width |       | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Plate Thickness |
|------------------|-------------|-------------|-------|--------|------------------------|--------------------------|-----------------|
|                  |             | A           |       |        |                        |                          |                 |
|                  |             | mm          | inch  | kg/m   | N (21°C)               | mm                       | mm              |
| XLA-Acetal       |             |             |       |        |                        |                          |                 |
| XLA_HDS LBP-10IN | 10139132    | 254.0       | 10.00 | 5.23   | 3830                   | 200                      | 4.8             |
| XLA_HDS LBP-12IN | 10139133    | 304.8       | 12.00 | 5.83   |                        |                          |                 |

Standard length: 1.524 m – 5 feet (40 links).




Magnetflex® Heavy Duty LBP

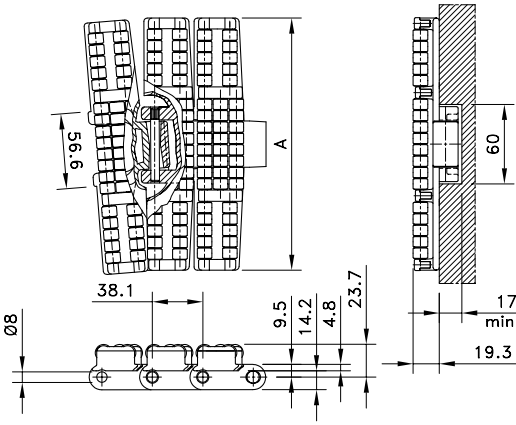

| Chain Type         | Code Number | Plate Width |       | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------|-------------|-------------|-------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                    |             | A           |       |        |                       |                     |                       |                 |
|                    |             | mm          | inch  | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| XLA-Acetal         |             |             |       |        |                       |                     |                       |                 |
| XLA_HDFM LBP-7.5IN | 10139139    | 190.5       | 7.50  | 4.28   | 610                   | 3830                | 200                   | 4.8             |
| XLA_HDFM LBP-10IN  | 10139140    | 254.0       | 10.00 | 5.23   |                       |                     |                       |                 |
| XLA_HDFM LBP-12IN  | 10139141    | 304.8       | 12.00 | 5.83   |                       |                     |                       |                 |

Standard length: 1.524 m - 5 feet (40 links).


## Standard Radius Single Hinge LBP

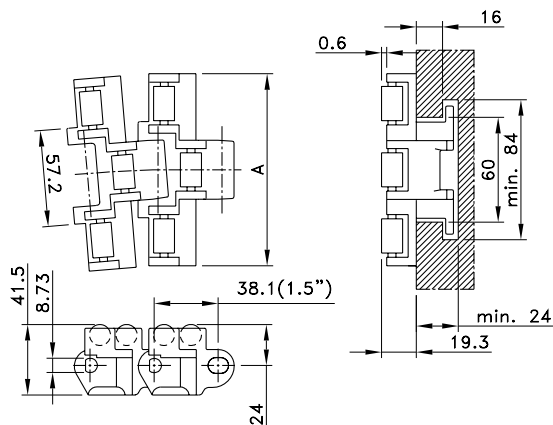

| Chain Type         | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                    |             | A           |      |        |                       |                     |                       |                 |
|                    |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| LF-Acetal          |             |             |      |        |                       |                     |                       |                 |
| LF883TAB LBP-4.5IN | 10177547    | 114.3       | 4.50 | 2.50   | 610                   | 3830                | 51                    | 4.8             |
| LF883TAB LBP-7.5IN | 10177548    | 190.5       | 7.50 | 3.40   |                       |                     |                       |                 |

Standard length: 3.048 m - 10 feet (80 links).

## Small Radius Single Hinge Tab LBP

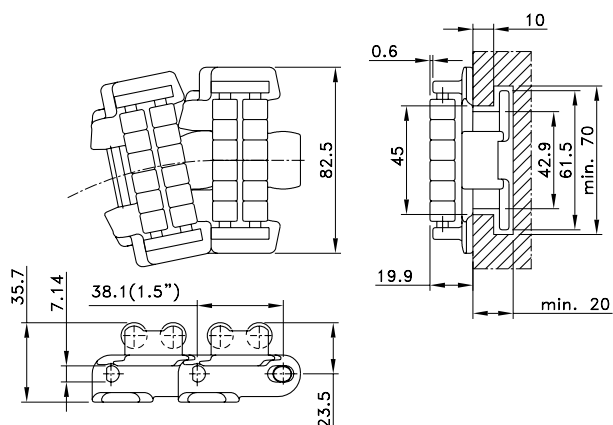


| Chain Type             | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                        |             | A           |      |        |                       |                     |                       |                 |
|                        |             | mm          | inch |        |                       |                     |                       |                 |
| LF-Acetal              |             |             |      |        |                       |                     |                       |                 |
| LF879TAB BO LBP-3.25IN | 10349805    | 82.5        | 3.25 | 1.08   | 200                   | 2100                | 100                   | 4.8             |

Standard length: 3.048 m - 10 feet (80 links).

\* Minimum order quantity 30.48 m – 100 feet.


## Sideflex Heavy Duty Tab LBP

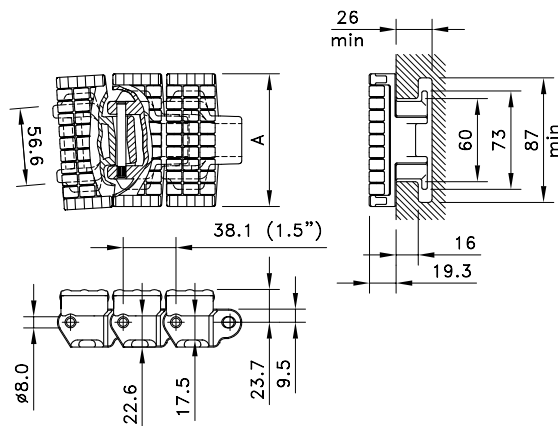

| Chain Type         | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                    |             | A           |      |        |                       |                     |                       |                 |
|                    |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| XLA-Acetal         |             |             |      |        |                       |                     |                       |                 |
| XLA_HDF LBP-3.75IN | 10139142    | 95.3        | 3.75 | 3.30   | 667                   | 3830                | 200                   | 4.8             |

Standard length: 1.524 m - 5 feet (40 links).




## Sideflex Heavy Duty Tab LBP

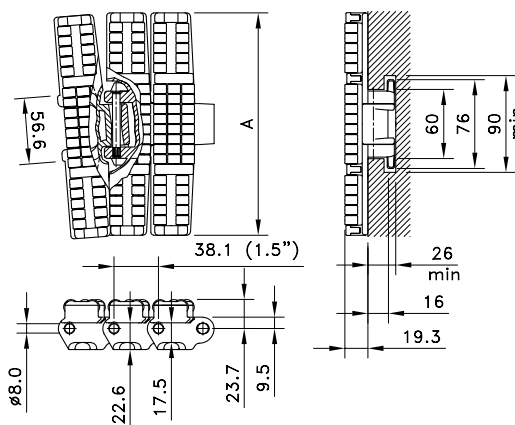

| Chain Type        | Code Number | Plate Width |       | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|-------------------|-------------|-------------|-------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                   |             | A           |       |        |                       |                     |                       |                 |
|                   |             | mm          | inch  | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| XLA-Acetal        |             |             |       |        |                       |                     |                       |                 |
| XLA_HDF LBP-7.5IN | 10139143    | 190.5       | 7.50  | 4.50   | 610                   | 3830                | 200                   | 4.8             |
| XLA_HDF LBP-10IN  | 10139144    | 254.0       | 10.00 | 5.71   |                       |                     |                       |                 |
| XLA_HDF LBP-12IN  | 10139145    | 304.8       | 12.00 | 6.38   |                       |                     |                       |                 |

Standard length: 1.524 m - 5 feet (40 links).



## FlatTop Magnetflex 1040

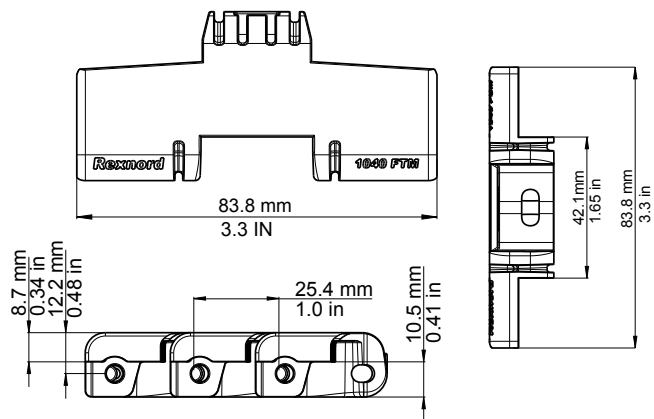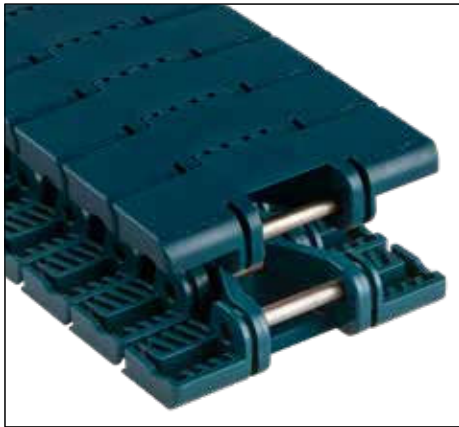

Rexnord 1040 Series Magnetflex TableTop Chain Material Overview

| Chain Type          | Material | Code Number | Working Load (max) | Weight        | Backflex Radius (min) | Plate Thickness | Sideflex Radius (min) | Plate Width |
|---------------------|----------|-------------|--------------------|---------------|-----------------------|-----------------|-----------------------|-------------|
|                     |          |             | lbs / N            | lbs/ft / kg/m | mm / in               | mm / in         | mm / in               | mm / in     |
| DRY-PT1040FTM-3.3IN | DRY-PT   | 10604554    | 337 / 1500         | 0.67 / 1.00   | 130.0 / 5.12          | 8.7 / 0.34      | 500 / 19.7            | 83.8 / 3.33 |
| PSX1040FTM-3.3IN    | PSX      | 10604578    |                    |               |                       |                 |                       |             |
| XLG1040FTM-3.3IN    | XLG      | 10604555    |                    |               |                       |                 |                       |             |
| HP1040FTM-3.3IN     | HP       | 10608553    |                    |               |                       |                 |                       |             |
| DKA1040FTM-3.3IN    | DKA      | 10608551    |                    |               |                       |                 |                       |             |


## Flush Grid Magnetflex 1040

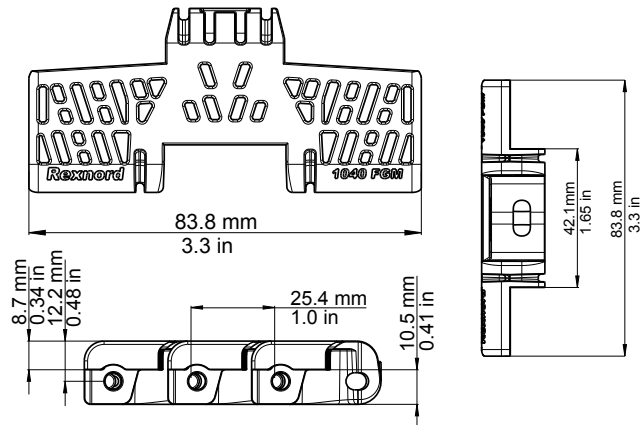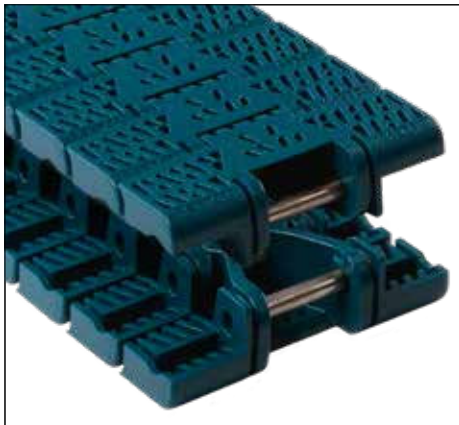

Rexnord 1040 Series Magnetflex Flush Grid TableTop Chain Material Overview

| Chain Type          | Material | Code Number | Working Load (max) | Weight        | Backflex Radius (min) | Plate Thickness | Sideflex Radius (min) | Plate Width |
|---------------------|----------|-------------|--------------------|---------------|-----------------------|-----------------|-----------------------|-------------|
|                     |          |             | lbs / N            | lbs/ft / kg/m | mm / in               | mm / in         | mm / in               | mm / in     |
| DRY-PT1040FGM-3.3IN | DRY-PT   | 10604582    | 337 / 1500         | 0.64 / 0.95   | 130.0 / 5.12          | 8.7 / 0.34      | 500 / 19.7            | 83.8 / 3.33 |
| PSX1040FGM-3.3IN    | PSX      | 10604586    |                    |               |                       |                 |                       |             |
| XLG1040FGM-3.3IN    | XLG      | 10604583    |                    |               |                       |                 |                       |             |
| HP1040FGM-3.3IN     | HP       | 10608555    |                    |               |                       |                 |                       |             |
| DKA1040FGM-3.3IN    | DKA      | 10608554    |                    |               |                       |                 |                       |             |


## FlatTop Magnetflex® 1060

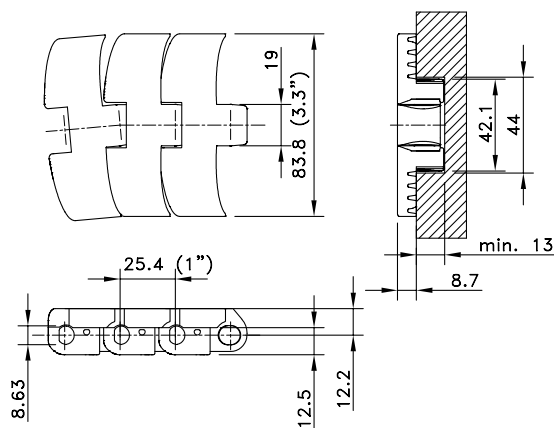

| Chain Type                             | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|----------------------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                                        |             | A           |      |        |                       |                     |                       |                 |
|                                        |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| XLG-Acetal                             |             |             |      |        |                       |                     |                       |                 |
| XLG1060FTM-3.3IN                       | 10139063    | 83.8        | 3.30 | 1.68   | 500                   | 1900                | 130                   | 8.7             |
| PSX Advanced Performance Polymer Alloy |             |             |      |        |                       |                     |                       |                 |
| PSX1060FTM-3.3IN                       | 10312036    | 83.8        | 3.30 | 1.68   | 500                   | 1900                | 130                   | 8.7             |

Standard length: 3.048 m - 10 feet (120 links).


## FlatTop Magnetflex® 1055

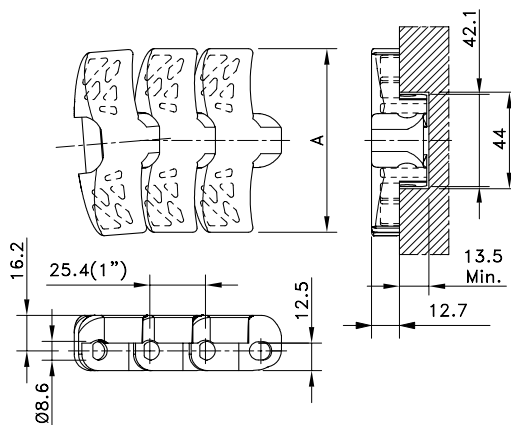

| Chain Type                             | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|----------------------------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                                        |             | A           |      |        |                       |                     |                       |                 |
|                                        |             | mm          | inch |        |                       |                     |                       |                 |
| XLG-Acetal                             |             |             |      |        |                       |                     |                       |                 |
| XLG1055FTM-3.3IN                       | 10375089    | 83.8        | 3.30 | 1.90   | 500                   | 2200                | 130                   | 12.7            |
| XLG1055FTM-4.5IN                       | 10186163    | 114.3       | 4.50 | 2.20   |                       |                     |                       |                 |
| PSX Advanced Performance Polymer Alloy |             |             |      |        |                       |                     |                       |                 |
| PSX1055FTM-3.3IN                       | 10375002    | 83.8        | 3.30 | 1.90   | 500                   | 2200                | 130                   | 12.7            |

Standard length: 3.048 m - 10 feet (120 links).


## FlatTop 1050 TAB

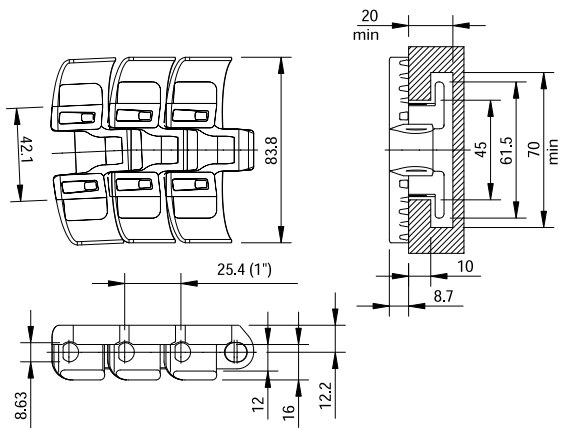

| Chain Type         | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                    |             | A           |      |        |                       |                     |                       |                 |
|                    |             | mm          | inch |        |                       |                     |                       |                 |
| XLG-Acetal         |             |             |      |        |                       |                     |                       |                 |
| XLG1050FTTAB-3.3IN | 10375093    | 83.8        | 3.30 | 1.93   | 500                   | 1650                | 130                   | 8.7             |

Standard length: 3.048 m - 10 feet (120 links).

## FlatTop 1055 TAB

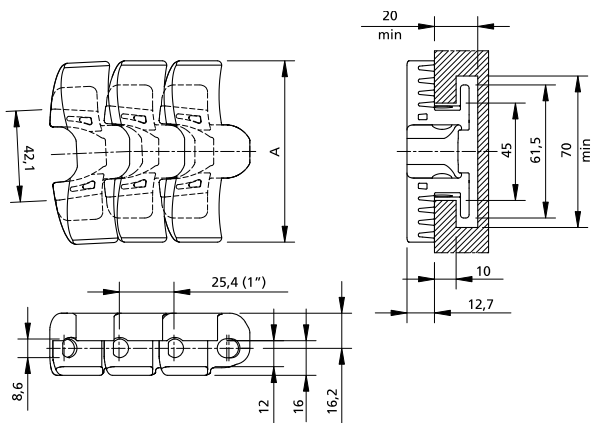

| Chain Type         | Code Number | Plate Width |      | Weight | Sideflex Radius (min) | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|--------------------|-------------|-------------|------|--------|-----------------------|---------------------|-----------------------|-----------------|
|                    |             | A           |      |        |                       |                     |                       |                 |
|                    |             | mm          | inch | kg/m   | mm                    | N (21°C)            | mm                    | mm              |
| XLG-Acetal         |             |             |      |        |                       |                     |                       |                 |
| XLG1055FTTAB-3.3IN | 10139075    | 83.8        | 3.30 | 2.13   | 500                   | 2200                | 130                   | 12.7            |
| XLG1055FTTAB-4.5IN | 10374992    | 114.3       | 4.50 | 2.30   | 500                   | 2200                | 130                   | 12.7            |

Standard length: 3.048 m - 10 feet (120 links).