


Part. S0562



For round tubes

Connecting Joints

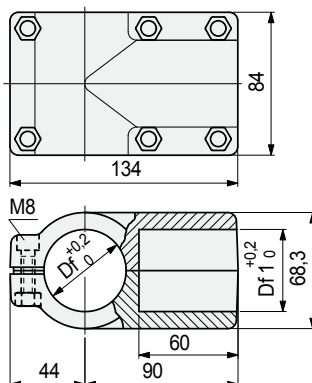

Vertical tube dia. mm	Horizontal tube dia. mm	Bore dia. Df mm	Bore dia. Df1 mm
-----------------------------	-------------------------------	-----------------------	------------------------

48,3 (1 7/8)	48,3 (1 7/8)	48,3	48,3	Code
				697861


- Material: joint in reinforced polyamide PA FV (black). Tightening screws in austenitic stainless steel, nuts in nickel plated brass.
- Weight: 0,4 Kg.
- Max recommended tightening torque: 1,5 Kgm.
- Packaging: 8 pieces.

Part. S0563



For round tubes

Connecting Joints

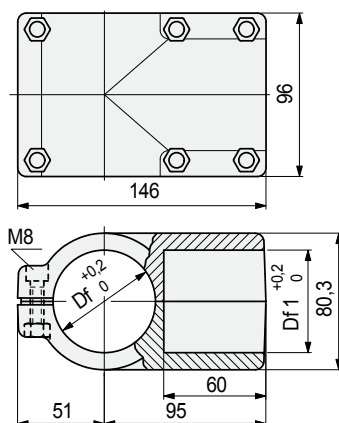


Vertical tube dia. mm	Horizontal tube dia. mm	Bore dia. Df mm	Bore dia. Df1 mm
-----------------------------	-------------------------------	-----------------------	------------------------

50,8	50,8	50,8	50,8	Code
60,3 (2")	60,3 (2")	60,3	60,3	697891


- Material: joint in reinforced polyamide PA FV (black). Tightening screws in austenitic stainless steel, nuts in nickel plated brass.
- Weight: 0,5 Kg.
- Max recommended tightening torque: 1,5 Kgm.
- Packaging: 8 pieces.

Assembly of Part. S0562

Example of assembly with vertical tubes $\varnothing 33,7$ mm

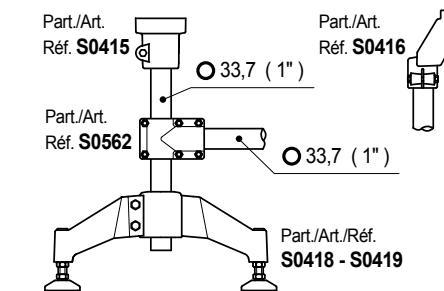


Example of assembly with vertical tubes $\varnothing 48,3$ mm

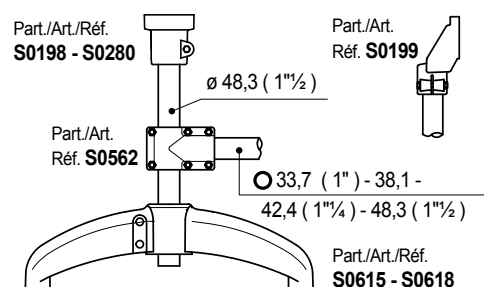


Assembly of Part. S0563

Example of assembly with vertical tubes $\varnothing 60,3$ mm

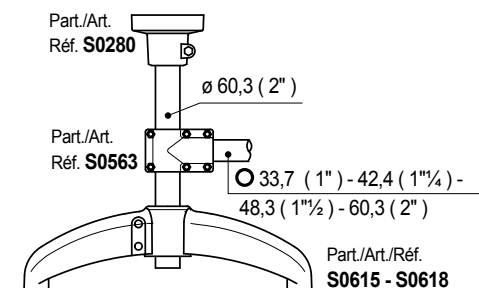

Sliding load resistance




Part. S0562 (P = 2000 N) - (P1 = 3500 N)
Part. S0563 (P = 1500 N) - (P1 = 3000 N)


Tests performed at tightening torque: 1,5 Kgm

• Assembly of Part. S0564

Example of assembly with vertical tubes ∇ 40 mm

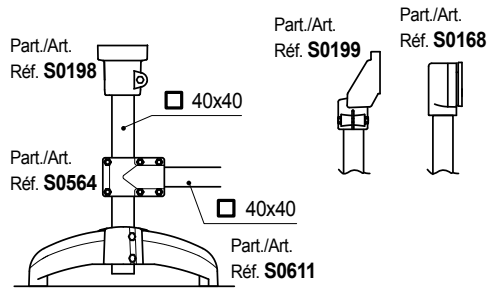

■ Connecting Joints

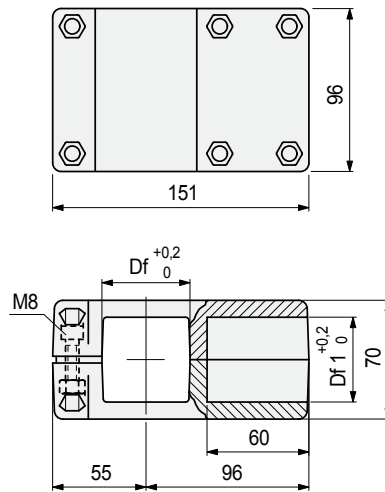

Tube dimensions mm	Bore Df mm	Bore Df1 mm	Code
∇ 40 x 40	∇ 40	∇ 40	698541
∇ 50 x 50	∇ 50	∇ 50	698551

- Material: joint in reinforced polyamide PA FV (black).
Tightening screws in austenitic stainless steel,
nuts in nickel plated brass.
- Weight: 0,5 Kg.
- Max recommended tightening torque: 1,5 Kgm.
- Packaging: 8 pieces.

Part. S0564




For square tubes

Part. S0137

Connecting Joints



For round tubes




Vertical tube dia. mm	Horizontal tube dia. mm	Bore dia. Df mm	Bore dia. Df1 mm	Code
Ø 48,3 (1 7/8")	Ø 42,4 (1 3/4")	48,3	42,4	66813
Ø 60,3 (2")	Ø 42,4 (1 3/4")	60,3	42,4	65020


- Material: joint in reinforced polyamide PA FV (black).
Tightening screws in austenitic stainless steel,
tightening bushes in nickel plated brass.
- Weight: 0,44 Kg.
- Max recommended tightening torque: 1 Kgm.
- Packaging: 8 pieces.

• Assembly of Part. S0137


Example of assembly with vertical tubes Ø 48,3 mm

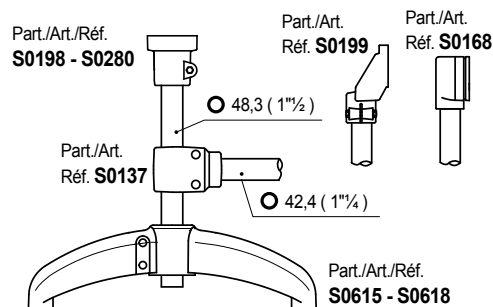


Example of assembly with vertical tubes Ø 60,3 mm

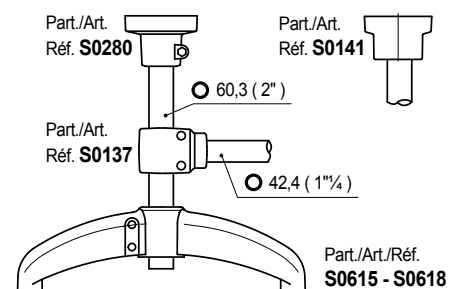

• Deflection

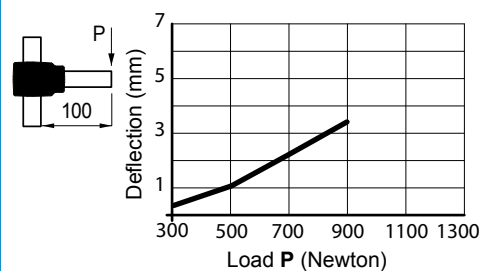

• Sliding load resistance



P = 1000 N

Tests performed at tightening torque: 1 Kgm


[illegible]

Part. S0686



For tubes Ø 48,3 mm



■ Connecting Joints

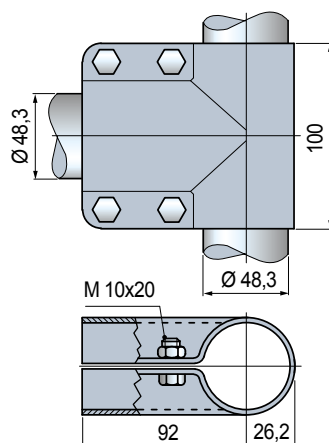

Tube dia. mm	State of supply	Code	Weight kg
48,3 (1" 1/2)	With bolts	684512	0,64
	Without bolts	684522	

- Material: joint and bolts in austenitic stainless steel.
- Packaging: 4 pieces.

• Assembly Part. S0686

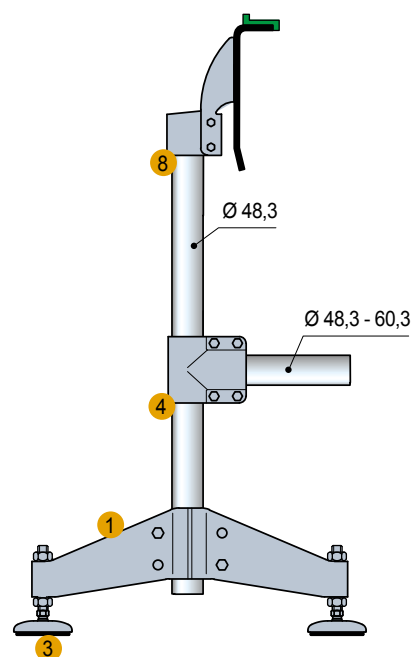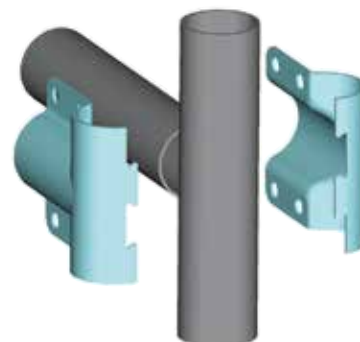

- 1 - Part. S0706
- 2 - Part. S0707
- 3 - Part. S0623 - S0627
- 4 - Part. S0686
- 7 - Part. S0690
- 8 - Part. S0685

