

ARTICULATED FEET
in reinforced polyamide

Pag. R08 - R20



**ARTICULATED FEET
GRIPPER**
in reinforced polypropylene
and stainless steel

Pag. R22 - R33



ARTICULATED FEET
in steel

Pag. R34 - R39



FIXED FEET
in steel

Pag. R39



THREADED BUSHINGS
for round and square tubes

Pag. R40 - R41



**ARTICULATED
FEET
in
reinforced
polyamide**



Part. R0173 - Pag. R08-R09
Ø 50 • Max. load 10000 N.



Part. R0098 - Pag. R10-R11
Ø 60 • Max. load 12000 N.



Part. R0323 - Pag. R12-R13
Ø 80 • Prefitting for fixing
• Max. load 10000 N.



Part. R0133 - Pag. R14-R15
Ø 100 • Prefitting for fixing
• Max. load 13000 N.




Part. R0479 - Pag. R16-R17
Ø 110 • Prefitting for fixing
• Max. load 20000 N.



Part. R0869 - Pag. R18
Ø 124 • Prefitting for fixing
• Max. load 45000 N.



Part. R0169 - Pag. R19
Ø 124 • Prefitting for fixing
• Max. load 45000 N.



Part. R0134 - Pag. R20
Ø 100 • Prefitting for fixing
• Max. load 20000 N.



Part. R0297 - Pag. R21
Ø 124 • Prefitting for fixing
• Max. load 45000 N.



Part. R0726 - Pag. R18-R19-R21
Ø 170 • Spacer for
Réf. R0869 - R0169 - R0297.

**ARTICULATED
FEET
GRIPPER
in
reinforced
polypropylene**



Part. R0626 - Pag. R22-R23
Ø 80 • Hygiene
• Customized with logo
• Max. load 12000 N.



Part. R0622 - Pag. R26-R27
Ø 100 • Hygiene
• Customized with logo
• Max. load 19500 N.



Part. R0628 - Pag. R30-R31
Ø 120 • Hygiene
• Customized with logo
• Max. load 22000 N.

**ARTICULATED
FEET
GRIPPER
in
stainless
steel**



Part. R0627 - Pag. R24-R25
Ø 80 • Hygiene
• Customized with logo
• Max. load 12000 N.



Part. R0623 - Pag. R28-R29



Part. R0629 - Pag. R32-R33
Ø 120 • Hygiene
• Customized with logo
• Max. load 22000 N.

ARTICULATED FEET in steel



Part. R0349 - Pag. R34
Ø 123 • N. 4 holes • Stainless
steel and zinc plated steel
• Max. load 10000 N.



Part. R0408 - Pag. R35
Ø 160 • Painted steel
• Max. load 50000 N.



Part. R0747 - Pag. R36
Ø 80 • Stainless steel
• Hygiene • Max. load 25000 N.



Part. R0748 - Pag. R37
Ø 100 • Stainless steel
• Hygiene • Max. load 25000 N.



Part. R0749 - Pag. R38
Ø 120 • Stainless steel
• Hygiene • Max. load 25000 N.



Part. R0747F - Pag. R037
Ø 80 • Stainless steel
• Hygiene • Prefitting for fixing
• Max. load 25000 N.



Part. R0748F - Pag. R37
Ø 100 • Stainless steel
• Hygiene • Prefitting for fixing
• Max. load 25000 N.



Part. R0750S - Pag. R38
Ø 80 • Stainless steel
• Hygiene • Max. load 25000 N.



Part. R0750SF - Pag. R38
Ø 80 • Stainless steel
• Hygiene • Prefitting for fixing
• Max. load 25000 N.

***FIXED
FEET
in
steel***



Part. R0406 - Pag. R39
 Ø 123 • Painted steel
 • Max. load 50000 N.

**THREADED
BUSHINGS**
for
round and
square tubes



Part. R0180 - Page R40
For round tubes
Ø 48,3-54-60.3 mm and 2"



Part. R0224 - Page R41
For square tubes 40-50 mm
and 2"

■ SPINDLE MATERIALS

Stainless steel

- High resistance to chemicals.
- Excellent resistance to oxidation.
- Operating temperature :
in air (- 70°C to + 430°C)
in hot water (+ 120°C)
- Sectors of use
Humid and corrosive environments. Environments where hygiene regulations are strict and indispensable (food and dairy industry, chemicals-pharmaceuticals, bottling). Electronics industry (where non-magnetic properties are required).

Zinc plated steel

- Operating temperature :
in air (- 40°C to + 180°C)
in hot water (+ 120°C)
- Sectors of use
Moisture-free environments with low corrosion.

Nickel plated brass

- Good resistance to chemicals.
- Operating temperature :
in air (- 40°C to + 180°C)
in hot water (+ 120°C)
- Sectors of use
Humid and wet environments.

Reinforced polyamide with steel pin

- Good resistance to chemicals.
- Operating temperature :
in air (- 5°C to + 120°C)
in hot water (+ 100°C)
- Colour: black.
- Sectors of use Industrial, packaging.

■ FOOTPLATE MATERIALS

Reinforced polyamide PA FV

- Good mechanical strength.
Able to withstand high load capacities.
- High thermal resistance.
- Good resistance to chemicals.
- Operating temperature:
in air (- 30°C to + 120°C)
in hot water (+ 100°C)
- Colour : black.
- Inflammability : 94HB.

Reinforced polypropylene PP FV

- Recommended in applications requiring high resistance to chemicals and fair mechanical properties (the load capacity is lower than reinforced polyamide).
- Operating temperature :
in air (+ 5°C to + 115°C)
in hot water (+ 115°C)
- Colour : black.
- Inflammability : 94HB.


■ ANTI-SLIP MATERIALS

NBR rubber

- Operating temperature :
in air (- 35°C to + 100°C)
in hot water (+ 80°C)
- Colour : black.
- Inflammability : 94HB

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Part. R0173

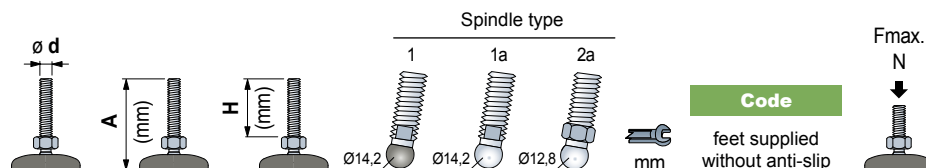

Spindle in stainless steel


							Code	
M16	105	81	-	1a	-	13	626663	10000
	155	124	-	1a	-	13	626673	

Spindle in zinc plated steel

							Code	
M10	95	71	-	-	2a	12	625332	10000
M12	90	69	-	-	2a	12	625362	
	120	96	-	-	2a	12	625372	


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black).
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

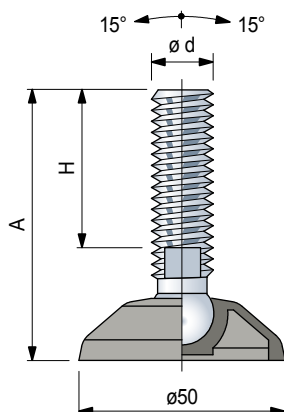


Accessories

Anti-slip



- Code: R0000630012.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

Articulated Feet in reinforced polyamide




REXNORD

Part. **R0173**

			Spindle type		Code	Fmax. N
			2a		feet supplied without anti-slip	
Spindle in stainless steel						
M10	95	71	2a	12	625252	10000
M12	90	69	2a	12	625262	
	155	132	2a	12	625272	


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black).
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

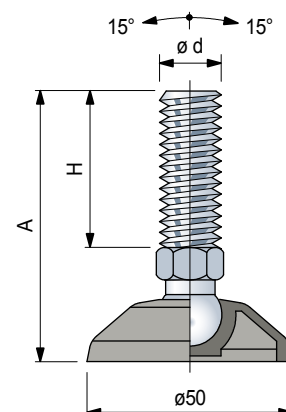


Accessories

Anti-slip



- Code: **R0000630012**.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

Part. R0098

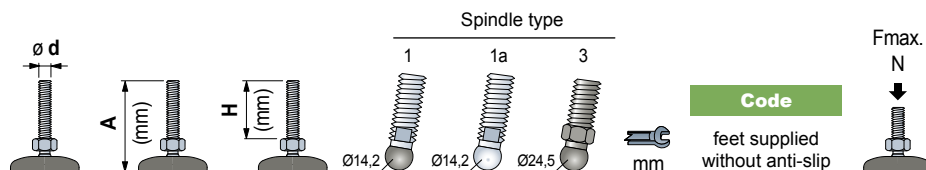

Spindle in stainless steel

M16	100	64	-	1a	-	13	626012	10000
	115	81	-	1a	-	13	626022	
	160	124	-	1a	-	13	626032	
	185	151	-	1a	-	13	626042	
M20	120	84	-	1a	-	16	626052	10000
	185	149	-	1a	-	16	626062	
	245	208	-	1a	-	16	621293	
M24	250	209	-	1a	-	19	621303	

Spindle in zinc plated steel

M16	95	61	-	1a	-	13	626102	10000
	150	116	-	1a	-	13	626122	
	185	151	-	1a	-	13	626132	
M20	185	150	-	1a	-	16	626152	
M24	240	150	-	1a	-	16	10344000	

Spindle in reinforced polyamid (black) with steel pin


M16	100	54	-	-	3	24	61920	6000
M24	240	205	-	1a	-	19	10344000	

Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black).
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 24 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.


Accessories

Anti-slip




- Code: **R0000630022**.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

Articulated Feet in reinforced polyamide



REXNORD

Part. R0098 Reinforced version

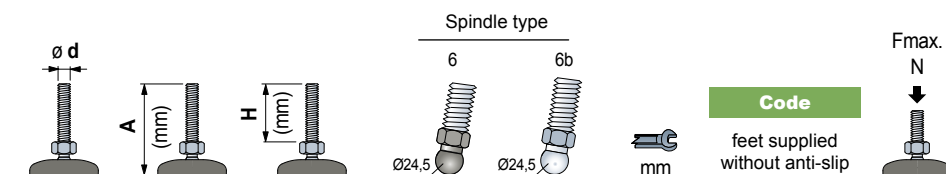


Spindle in stainless steel						
	150	109	-	6b	24	12000
M16	200	159	-	6b	24	
M24	220	179	-	6b	24	628872

Spindle in zinc plated steel						
M16	195	154	-	6b	24	628852


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black).
- Note: for spindles type 6 ball in reinforced polyamide.
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

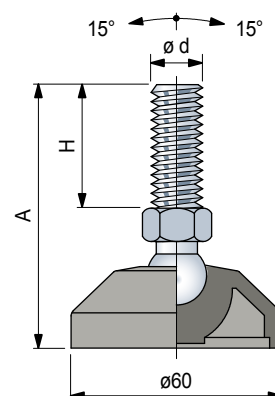


Accessories

Anti-slip



- Code: R0000630022.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

Part. R0323

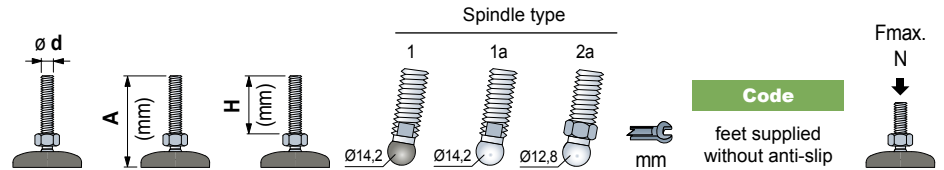

Spindle in stainless steel

				Spindle type			Code	
	95	64	-	1a	-	13	626582	
M16	110	81	-	1a	-	13	626592	
	155	124	-	1a	-	13	626602	
	180	151	-	1a	-	13	626612	
M20	115	84	-	1a	-	16	626622	
	180	149	-	1a	-	16	626632	

10000

Spindle in zinc plated steel

M10	95	71	-	-	2a	12	60464N	
M12	95	69	-	-	2a	12	62313N	
	120	96	-	-	2a	12	678941N	
M16	145	116	-	1a	-	13	626692	
	180	151	-	1a	-	13	626702	
M20	180	150	-	1a	-	16	626722	


9000

10000

Item code for order = Part. + Code


- Footplate material: reinforced polyamide PA FV (black).
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

Fixing holes, obtainable by breaking "diaphragm".

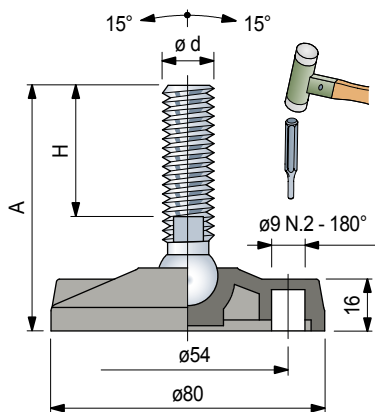


Accessories

Anti-slip




- Code: **R0000630042**.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

Articulated Feet in reinforced polyamide



REXNORD

Part. **R0323**

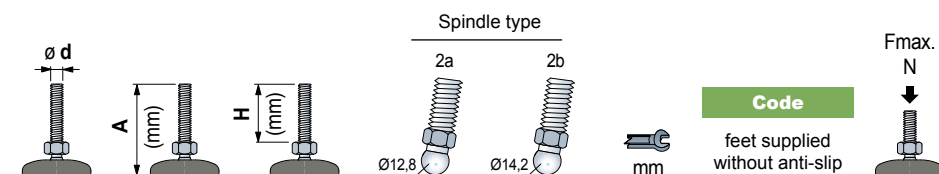

Spindle in stainless steel


			2a	2b		Code	
M10	95	71	2a	-	12	65686N	9000
M12	95	69	2a	-	12	65596N	
	155	132	2a	-	12	679061N	

Item code for order = Part. + Code

- Footplate material : reinforced polyamide PA FV (black).
- Packaging : 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.




Fixing holes,
obtainable by
breaking
"diaphragm".

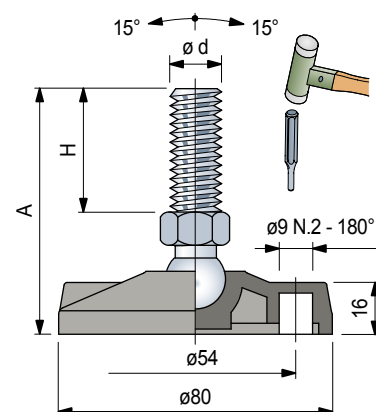

Accessories

Anti-slip




- Code: **R0000630042**.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 24 pieces

Part. R0133




Fixing holes, obtainable by breaking "diaphragm".

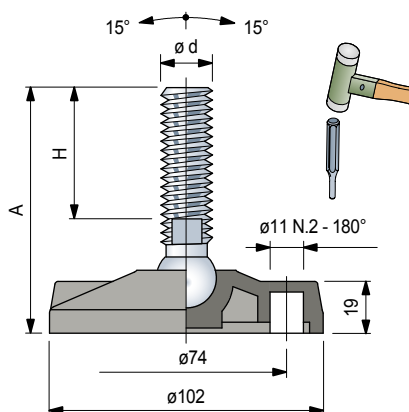


Accessories

Anti-slip



- Code: **R0000630052**.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

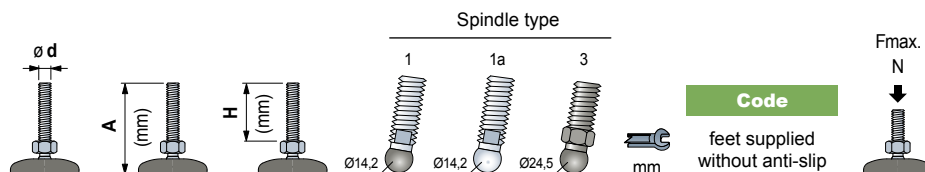

Spindle in stainless steel

M16	100	64	-	1a	-	13	633202	12000
	115	81	-	1a	-	13	633212	
	160	124	-	1a	-	13	633222	
	185	151	-	1a	-	13	633232	
M20	120	84	-	1a	-	16	633242	12000
	185	149	-	1a	-	16	633252	
	245	208	-	1a	-	16	627103	
M24	250	209	-	1a	-	19	627133	

Spindle in zinc plated steel

M16	95	61	-	1a	-	13	633292	12000
	150	116	-	1a	-	13	633312	
	185	151	-	1a	-	13	633322	
M20	185	150	-	1a	-	16	633342	

Spindle in reinforced polyamid (black) with steel pin

M16	100	54	-	-	3	24	627292	6000

Item code for order = Part. + Code


- Footplate material: reinforced polyamide PA FV (black).
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

Articulated Feet in reinforced polyamide

Ø100

REXNORD

Part. R0133 Reinforced version

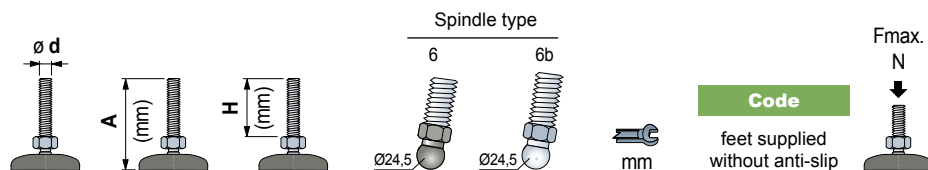

Spindle in stainless steel

M12	150	103	6	-	19	679251N	13000
M14	150	103	6	-	19	679311N	
M16	150	109	-	6b	24	627222	
	185	144	-	6b	24	627232	
M24	220	179	-	6b	24	627282	

Spindle in zinc plated steel


M16	195	154	-	6b	24	627352	13000

Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black).
- Note: for spindles type 6 ball in reinforced polyamide.
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.




Fixing holes,
obtainable by
breaking
"diaphragm".

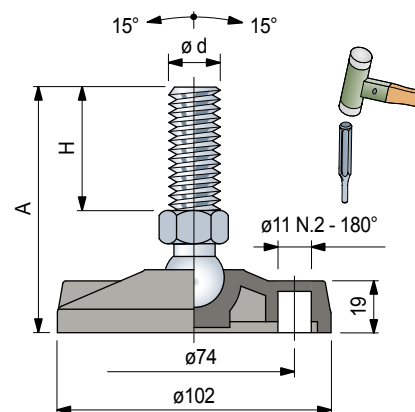


Accessories

Anti-slip




- Code: R0000630052.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

Part. R0479

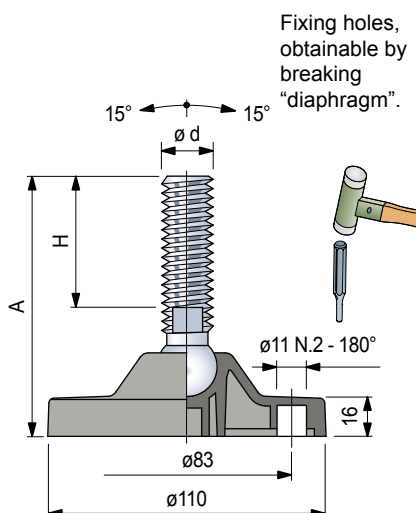


Accessories

Anti-slip



- Code: **R0000630062**.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

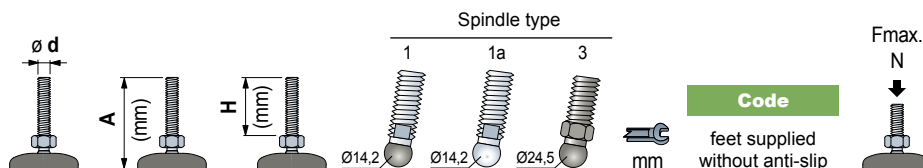

Spindle in stainless steel

M16	110	64	-	1a	-	13	633392	15000
	125	81	-	1a	-	13	633402	
	170	124	-	1a	-	13	633412	
	195	151	-	1a	-	13	633422	
M20	130	84	-	1a	-	16	633432	
	195	149	-	1a	-	16	633442	
	255	208	-	1a	-	16	627293	
M24	260	209	-	1a	-	19	627323	

Spindle in zinc plated steel

M16	105	61	-	1a	-	13	633482
	160	116	-	1a	-	13	633502
	195	151	-	1a	-	13	633512
M20	190	150	-	1a	-	16	633532
M24	195	146	-	1a	-	19	633562

Item code for order = Part. + Code


- Footplate material: reinforced polyamide PA FV (black).
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

Articulated Feet in reinforced polyamide

Ø110

REXNORD

Part. R0479 Reinforced version

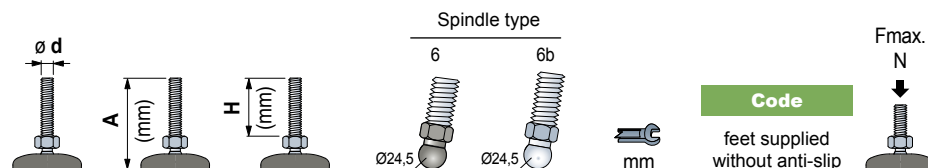

Spindle in stainless steel


M16	160	109	-	6b	24	627432
	195	144	-	6b	24	627442
M24	230	179	-	6b	24	627492

Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black).
- Note: for spindles type 6 ball in reinforced polyamide.
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.




Fixing holes, obtainable by breaking "diaphragm".

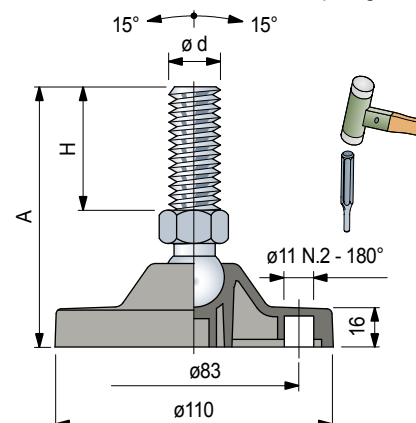

Accessories

Anti-slip




- Code: R0000630062.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

Articulated Feet

in reinforced polyamide and polypropylene

Part. R0869

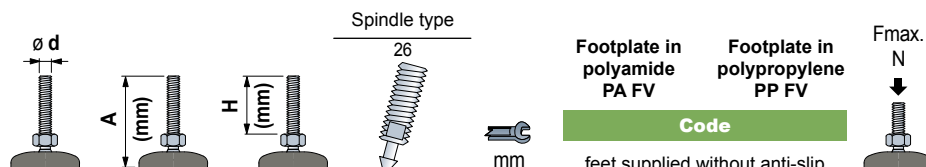

Spindle in stainless steel


					Footplate in polyamide PA FV	Footplate in polypropylene PP FV	
M16	200	140	26	13	618933	619313	45000 (PA FV) 13000 (PP FV)
M24	200	139	26	17	618973	619353	
	260	199	26	17	618983	619363	

Spindle in zinc plated steel

					Footplate in polyamide PA FV	Footplate in polypropylene PP FV	
M20	200	139	26	17	619153	619533	45000 (PA FV) 13000 (PP FV)
M24	350	287	26	19	619243	619623	


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black) and reinforced polypropylene PP FV (black).
- Packaging: 12 pieces.
- Anti-slip supplied separately (on request supplied fixed to the foot).
- On request different length.
- Fmax. = maximum applicable load in static conditions.

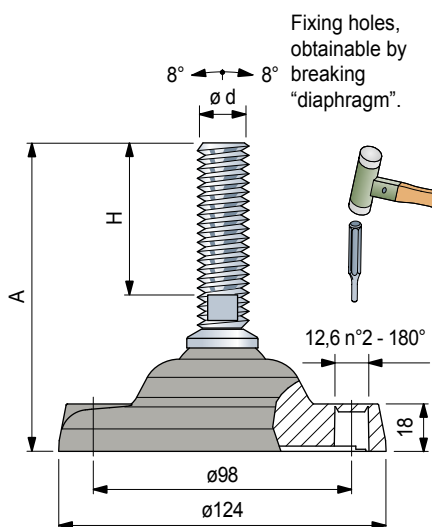

Accessories

Anti-slip




- Code with reinforcement disc: **R0000630082**.
- Code without reinforcement disc: **R0000630092**.
- Assembly: with screws for plate supplied loose.
- Material: NBR rubber (black), 80 Shore.
- Packaging: 12 pieces.

Part. R0726 - Spacer



- Code: **6887**
- Material: ac
- Weight: 1,1
- Packaging:

MEC
Maintenance Etudes Conditionnement

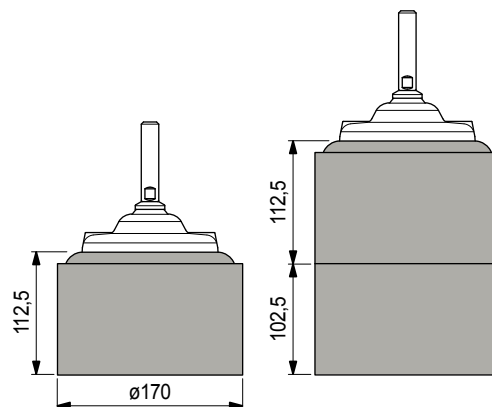


Articulated Feet

in reinforced polyamide and polypropylene

Ø124

REXNORD

Part. R0169

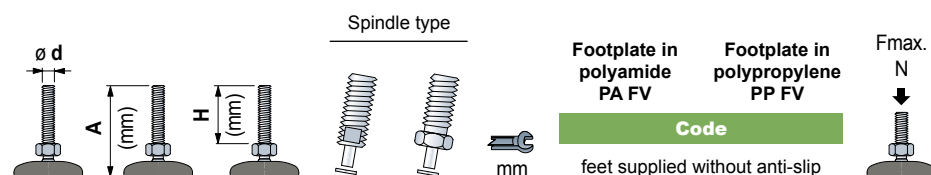

Spindle in stainless steel


M20	205	146	-	22	30	624812	628692	45000 (PA FV)
M30	205	152	21	-	24	624832	628712	13000 (PP FV)

Spindle in zinc plated steel

M20	205	146	-	22	30	624862	628742	45000 (PA FV) 13000 (PP FV)
	255	195	-	22	30	624872	628752	
M24	205	152	21	-	19	624892	628772	


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black) and reinforced polypropylene PP FV (black).
- Packaging: 12 pieces.
- Anti-slip supplied separately (on request supplied fixed to the foot).
- On request different length.
- Fmax. = maximum applicable load in static conditions.

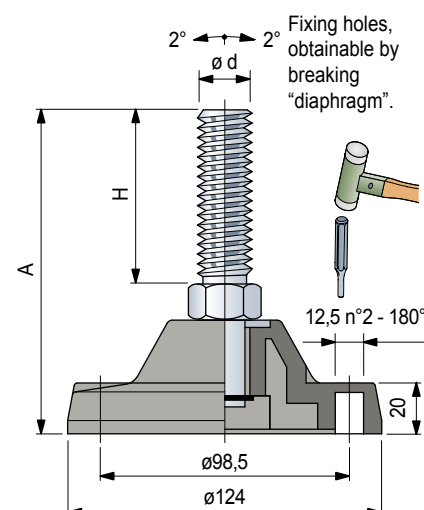

Accessories

Anti-slip




- Code with reinforcement disc: **R0000630082**.
- Code without reinforcement disc: **R0000630092**.
- Assembly: with screws for plate supplied loose.
- Material: NBR rubber (black), 80 Shore.
- Packaging: 12 pieces.


Part. R0726 - Spacer



- Code: **688772**.
- Material: acetal POM (black).
- Weight: 1,15 Kg.
- Packaging: 8 pieces.

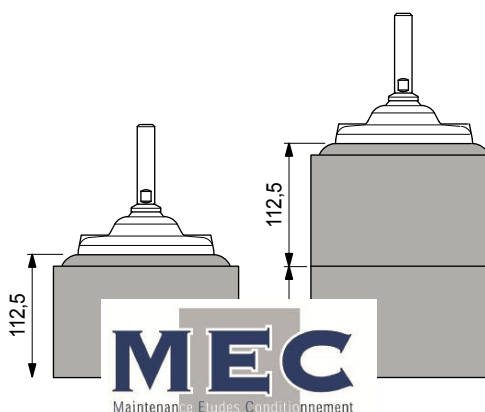

Part. R0134

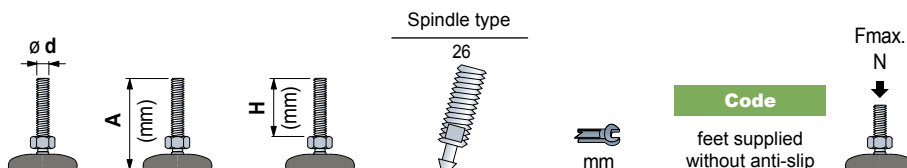


Spindle in stainless steel					
	180	140	26	13	Code
M20	180	139	26	17	627423
					627433

Spindle in zinc plated steel					
	150	109	26	17	Code
M20	150	109	26	17	627483
					20000


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black).
- Packaging: 12 pieces.
- Anti-slip supplied separately.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

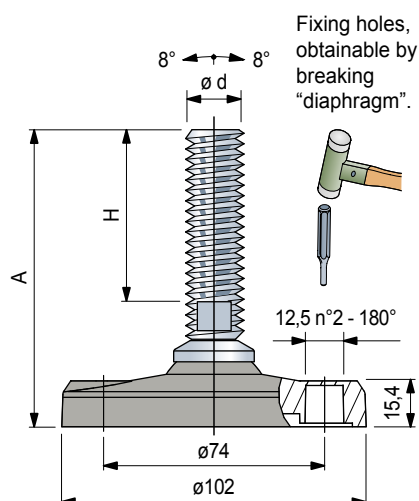

Accessories

Anti-slip




- Code: R0000630052.
- Material: NBR rubber (black), 70 Shore.
- Assembly: press-fit.
- Packaging: 12 pieces

Articulated Feet in reinforced polyamide

Ø124

REXNORD

Part. R0297

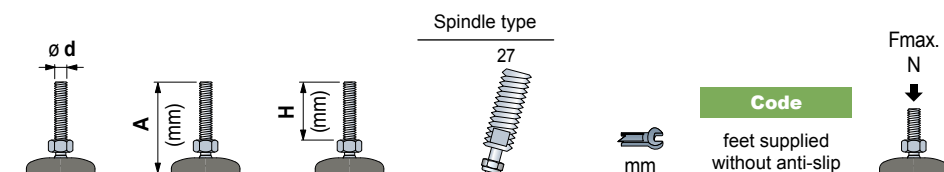


Spindle in stainless steel					
M16	210	140	27	13	629192N1
M20	210	140	27	17	629202N1
M30	195	125	27	24	629212N1
	250	180	27	24	629222N1

45000

Spindle in zinc plated steel					
M20	205	140	27	17	629242N1
M30	195	125	27	24	629252N1
	250	180	27	24	629262N1


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black).
- Packaging: 12 pieces.
- Anti-slip supplied separately (on request supplied fixed to the foot).
- On request different length.
- Fmax. = maximum applicable load in static conditions.

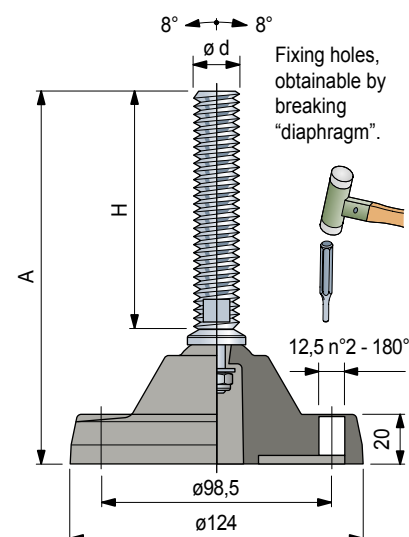

Accessories

Anti-slip




- Code with reinforcement disc: **R0000630082**.
- Code without reinforcement disc: **R0000630092**.
- Assembly: with screws for plate supplied loose.
- Material: NBR rubber (black), 80 Shore.
- Packaging: 12 pieces.



Part. R0726 - Spacer



- Code: **688772**.
- Material: acetal POM (black).
- Weight: 1,15 Kg.
- Packaging: 8 pieces.

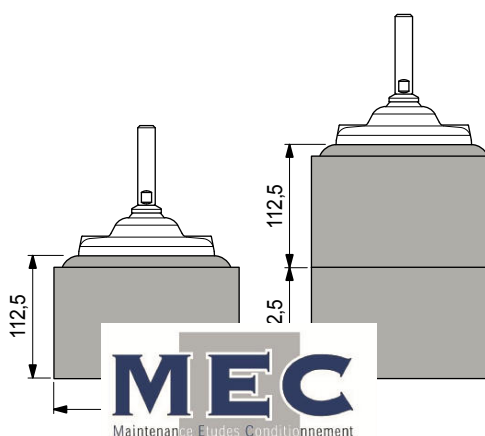

Part. R0626

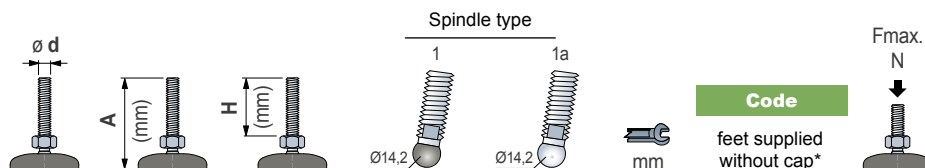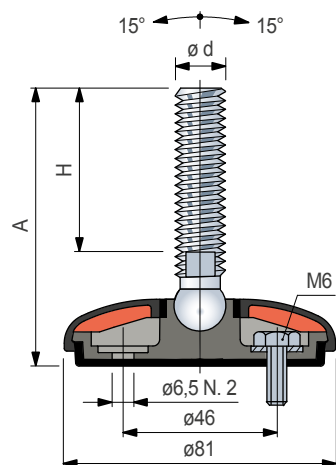

Spindle in stainless steel

M16	100	64	-	1a	13	641722	10000
	115	81	-	1a	13	641732	
	160	124	-	1a	13	641742	
	185	151	-	1a	13	641752	
M20	120	84	-	1a	16	641762	
	185	149	-	1a	16	641772	

Spindle in zinc plated steel

M16	95	61	-	1a	13	641812	10000
	150	116	-	1a	13	641832	
	185	151	-	1a	13	641842	
M20	185	150	-	1a	16	641872	

Item code for order = Part. + Code

- * = Feet are supplied without protection caps. Caps have to be ordered separately, indicating selected colour.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Feet can be fixed to the floor.
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 24 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

Protection cap


Color	Code
Black	R0626641952



- Material: polypropylene PP.
- Packaging: 24 pieces.

Articulated Feet Gripper

in reinforced polypropylene




REXNORD

Part. **R0626**

			Spindle type 	 mm	Code feet supplied without cap*	Fmax. N 
Spindle in stainless steel						
M12	85	55	2b	14	641402	10000

Item code for order = Part. + Code

- * = Feet are supplied without protection caps. Caps have to be ordered separately, indicating selected colour.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Feet can be fixed to the floor.
- Packaging: 24 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

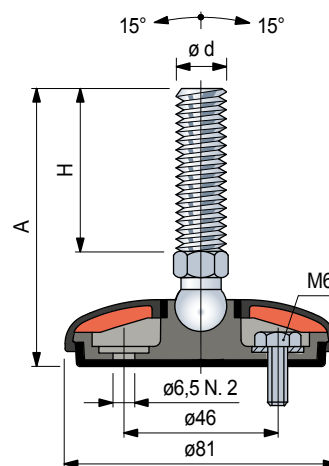


Protection cap

Color	Code
Black	R0626641952




- Material: polypropylene PP.
- Packaging: 24 pieces.

Part. R0627

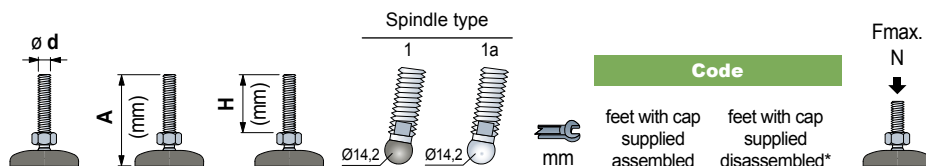

Spindle in stainless steel

						Code		Fmax. N ↓
						feet with cap supplied assembled	feet with cap supplied disassembled*	
M16	100	64	-	1a	13	642112	647332	10000
	115	81	-	1a	13	642122	647342	
	160	124	-	1a	13	642132	647352	
	185	151	-	1a	13	642142	647362	
M20	120	84	-	1a	16	642152	647372	10000
	185	149	-	1a	16	642162	647382	

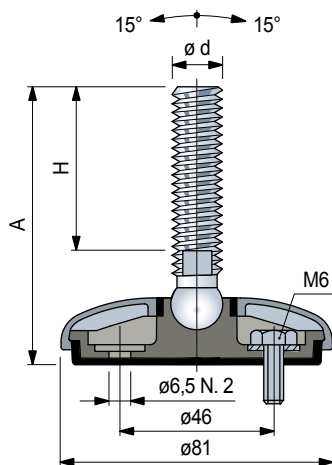


Item code for order = Part. + Code

* = Feet can be fixed to the floor.

- Protection cap material: stainless steel AISI 304.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.


Articulated Feet Gripper

in stainless steel



REXNORD

Part. **R0627**

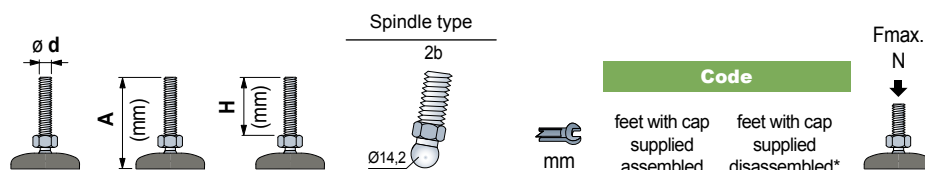


Spindle in stainless steel

M12	85	55	2b	14	641982	647302	10000
-----	----	----	----	----	--------	--------	-------


Item code for order = Part. + Code

* = Feet can be fixed to the floor.

- Protection cap material: stainless steel AISI 304.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

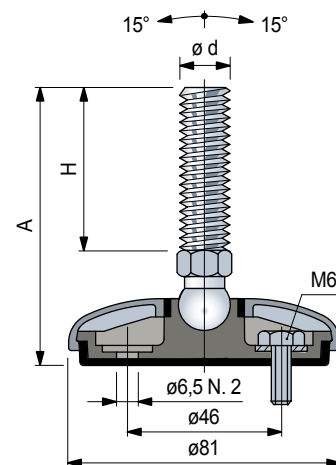

Part. R0622

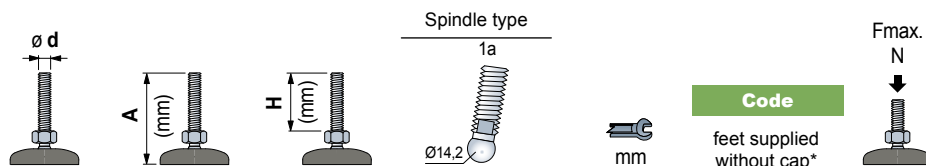

Spindle in stainless steel

M16	105	64	1a	13	643552
	120	81	1a	13	643562
	165	124	1a	13	643572
	190	151	1a	13	643582
M20	125	84	1a	16	643592
	190	149	1a	16	643602

19500


Spindle in zinc plated steel

M16	100	61	1a	13	643632
	155	116	1a	13	643652
	190	151	1a	13	643662
M20	190	150	1a	16	643682

19500

Item code for order = Part. + Code

- * = Feet are supplied without protection caps. Caps have to be ordered separately, indicating selected colour.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Feet can be fixed to the floor.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

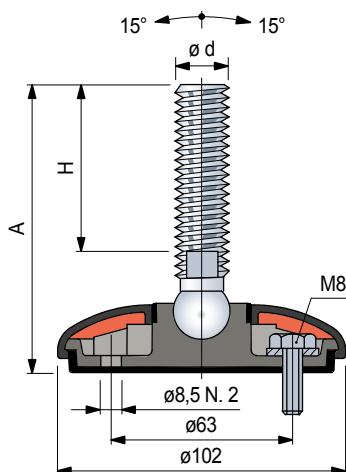

Protection cap

Color	Code
Black	R0622639412



- Material: polypropylene PP.
- Packaging: 24 pieces.


Articulated Feet Gripper

in reinforced polypropylene

Ø100


REXNORD

Part. **R0622**

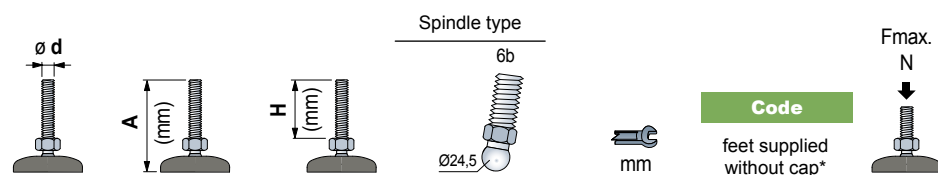


Spindle in stainless steel					
M16	150	109	6b	24	637272
	185	144	6b	24	637282

Spindle in zinc plated steel					
M16	195	154	6b	24	637372



Item code for order = Part. + Code

- * = Feet are supplied without protection caps. Caps have to be ordered separately, indicating selected colour.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Feet can be fixed to the floor.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

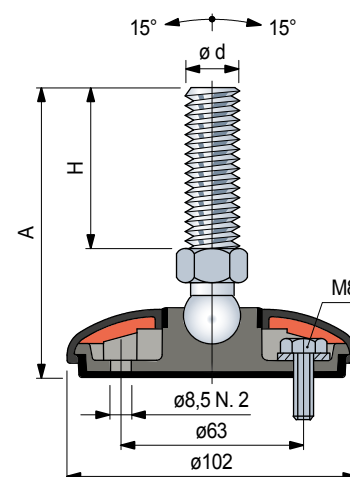


Protection cap

Color	Code
Black	R0622639412



- Material: polypropylene PP.
- Packaging: 12 pieces.

Part. R0623

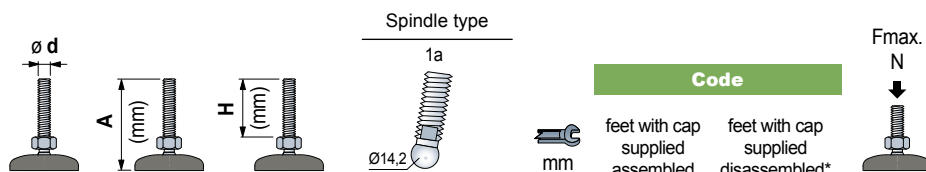


Spindle in stainless steel

M16	105	64	1a	13	643732	647412	19500
	120	81	1a	13	643742	647442	
	165	124	1a	13	643752	647472	
	190	151	1a	13	643762	647502	
M20	125	84	1a	16	643772	647552	
	190	149	1a	16	643782	647582	

Item code for order = Part. + Code

* = Feet can be fixed to the floor.

- Protection cap material: stainless steel AISI 304.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

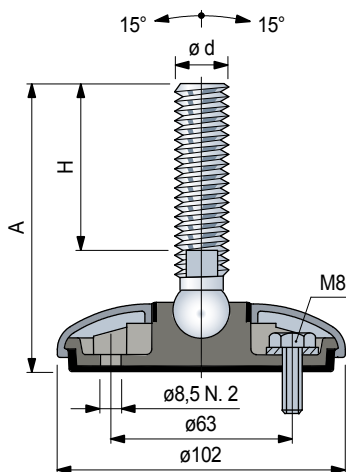


Articulated Feet Gripper

in stainless steel

Ø100

REXNORD

Part. **R0623**

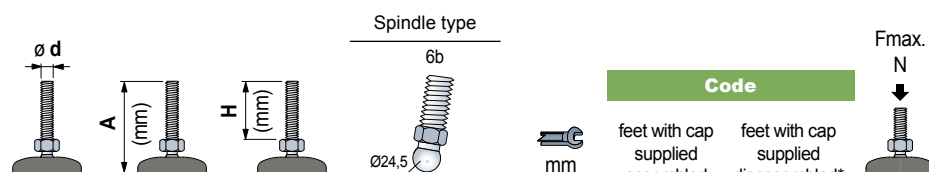


Spindle in stainless steel

M16	150	109	6b	24	637522	647452	19500
	185	144	6b	24	637532	647482	
	220	179	6b	24	637582	647622	


Item code for order = Part. + Code

* = Feet can be fixed to the floor.

- Protection cap material: stainless steel AISI 304.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Note: for spindles type 1 ball in reinforced polyamide.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

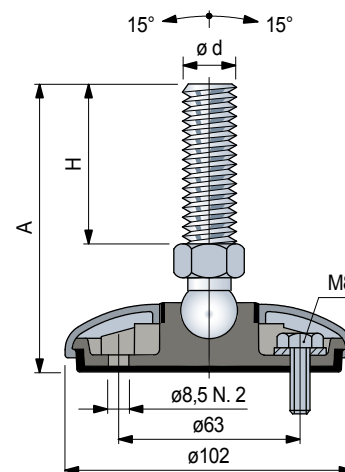

Part. R0628

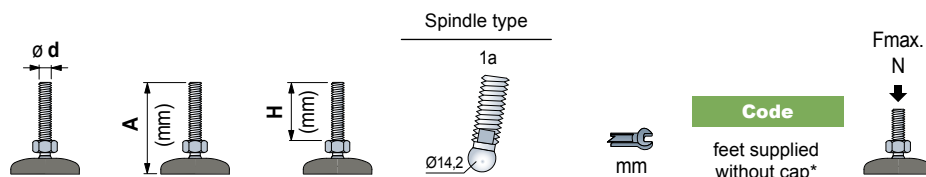

Spindle in stainless steel

M16	110	64	1a	13	643812	22000
	125	81	1a	13	643822	
	170	124	1a	13	643832	
	195	151	1a	13	643842	
M20	130	84	1a	16	643852	
	195	149	1a	16	643862	

Spindle in zinc plated steel

M16	105	61	1a	13	643892	22000
	160	116	1a	13	643912	
	195	151	1a	13	643922	
M20	195	150	1a	16	643942	

Item code for order = Part. + Code

- * = Feet are supplied without protection caps. Caps have to be ordered separately, indicating selected colour.
- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Feet can be fixed to the floor.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

Protection cap

Color	Code
Black	R0628643102



- Material: polypropylene PP.
- Packaging: 12 pieces.


Articulated Feet Gripper

in reinforced polypropylene

Ø120

REXNORD

Part. **R0628**

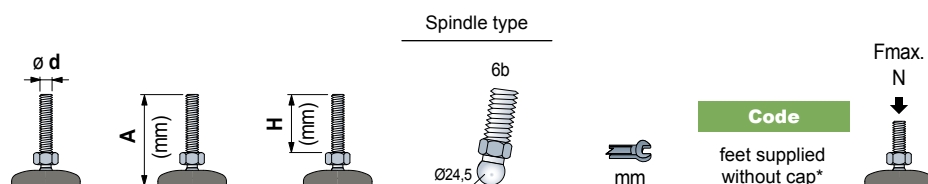

Spindle in stainless steel

	A (mm)	H (mm)	6b	mm	Code	
M16	155	109	6b	24	642462	22000
	190	144	6b	24	642482	
M20	225	179	6b	24	642582	


Spindle in zinc plated steel

	A (mm)	H (mm)	6b	mm	Code	
M16	200	154	6b	24	642662	22000

Item code for order = Part. + Code

* = Feet are supplied without protection caps. Caps have to be ordered separately, indicating selected colour.

- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Feet can be fixed to the floor.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

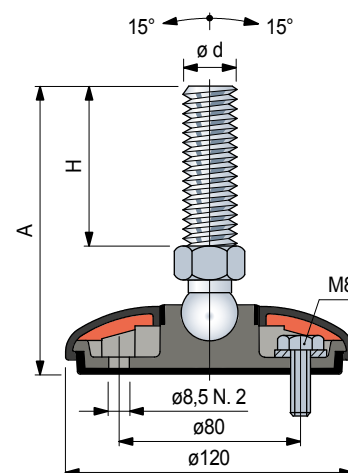

Protection cap

Color	Code
Black	R0628643102



- Material: polypropylene PP.
- Packaging: 12 pieces.

Part. R0629




			Spindle type		Code		Fmax. N
			</				

Item code for order = Part. + Code

* = Feet can be fixed to the floor.

- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Feet can be fixed to the floor.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

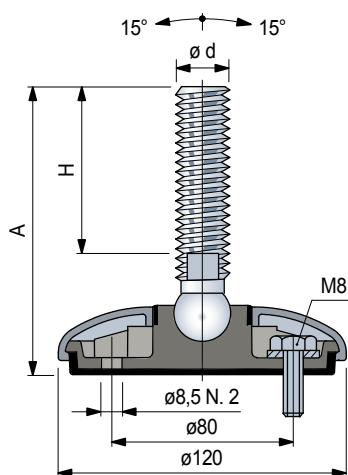


Articulated Feet Gripper

in stainless steel

Ø120

REXNORD

Part. **R0629**

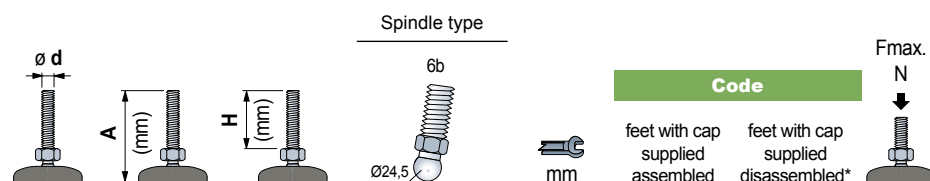


Spindle in stainless steel

	155	109	6b	24	642302	647692	22000
M16	190	144	6b	24	642322	647722	
M24	225	179	6b	24	642422	647862	

Item code for order = Part. + Code

* = Feet can be fixed to the floor.


- Base material: reinforced polypropylene with integrated anti-slip in thermoplastic rubber grey (70 Shore).
- The sealing of the internal structure guarantees a better hygiene.
- Feet can be fixed to the floor.
- Packaging: 12 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

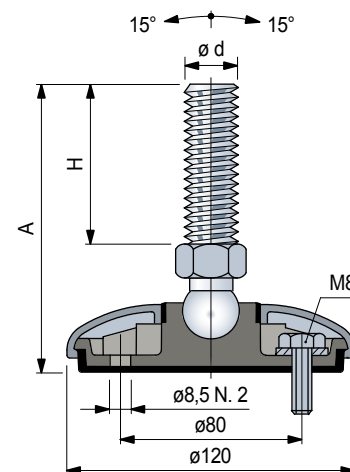

Part. R0349 4 holes



Part. R0349 4 holes

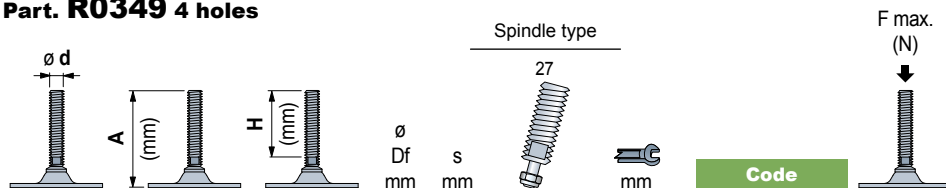


F max.
(N)

Feet in stainless steel								6000
M16	180	140	9	3	27	13	682721N1	
M20	180	140	9	3	27	17	68165N1	
M30	165	125	9	3	27	24	63757N1	
	225	180	9	3	27	24	682741N1	

Feet in zinc plated steel								10000
M20	175	140	9	4	27	17	65634N1	
M24	220	175	9	4	27	19	65054N1	
M30	165	125	9	4	27	24	65644N1	
	220	180	9	4	27	24	682711N1	

Item code for order = Part. + Code

- Packaging: 8 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

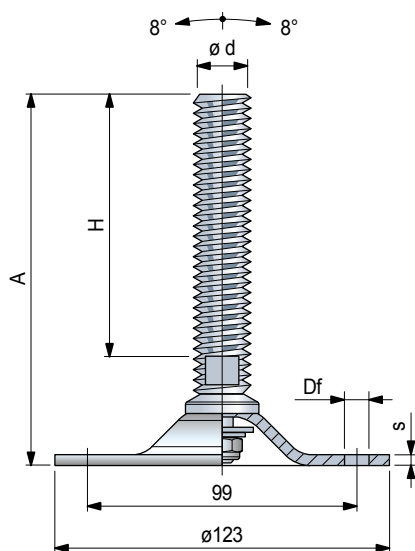


Articulated feet in painted steel

Ø160

REXNORD

Part. **R0408**

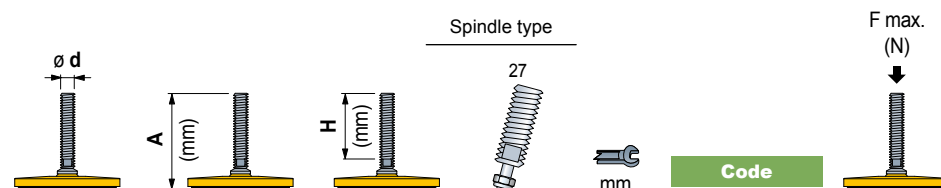




Spindle in stainless steel						
M24	220	175	27	19	678851N1	50000
M16	180	140	27	13	678831N1	50000
M20	180	140	27	17	678841N1	
M30	165	125	27	24	678861N1	
	225	180	27	24	678881N1	

Spindle in zinc plated steel						
M20	175	140	27	17	678771N1	
M24	220	175	27	19	678801N1	
M30	165	125	27	24	678811N1	
	220	180	27	24	678821N1	


Item code for order = Part. + Code

- Material: footplate in painted steel yellow. Anti-slip in NBR rubber black (70 Shore).
- Packaging: 4 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

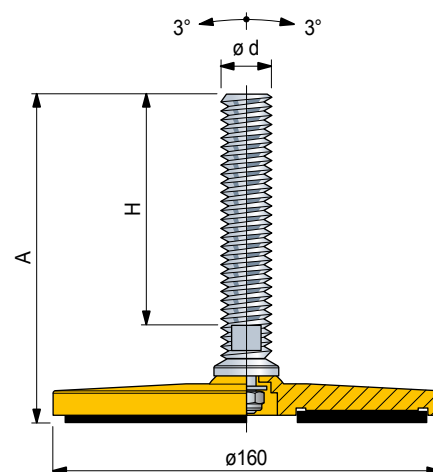


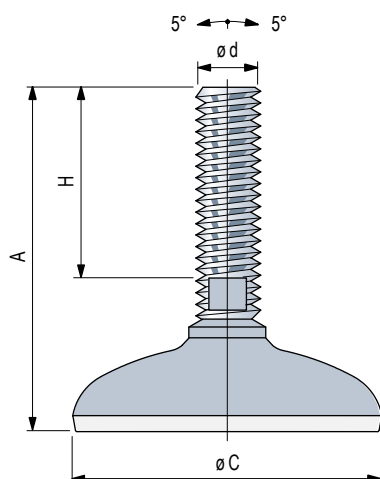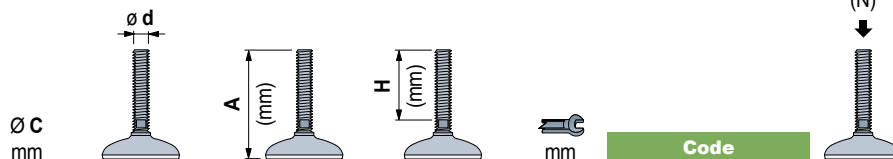Part. R0747
Part. R0748
Part. R0749

Part. R0747

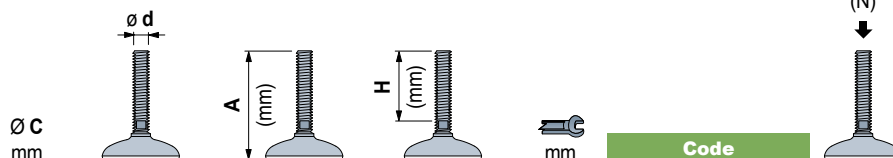Feet in stainless steel

	M16	182	136	13	602013	25000
	M20	187	139	16	602023	
	M30	215	165	27	620803	

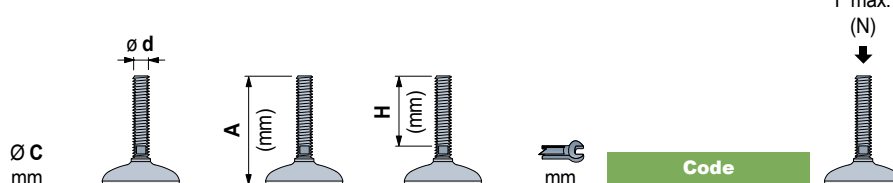Part. R0748

Feet in stainless steel

	M16	185	136	13	602053	25000
	M20	190	139	16	602063	
	M24	220	167	19	602073	
	M30	218	165	27	620823	

Part. R0749

Feet in stainless steel

	M16	190	136	13	602093	25000
	M20	195	139	16	602103	
		223	165	27	620843	
	M30	250	200	27	616433	50000

Item code for order = Part. + Code

- Material:

Spindle in austenitic stainless steel.

Footplate in austenitic stainless steel.

Anti-slip in vulcanized NBR rubber (grey), 75 Shore;

Part R0749616433 - R0749628033 anti-slip in vulcanized NBR rubber NBR (black), 95 Shore.


- Packaging: 4 pieces.

- On request different length.

- Fmax. = maximum applicable load in static conditions.

Articulated feet in stainless steel


Part. R0747F

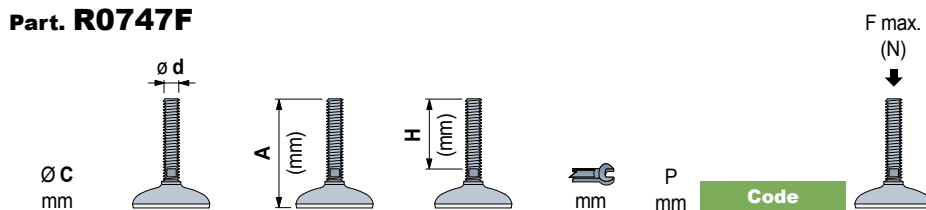

Feet in stainless steel

	M16	182	136	13	55	616063	25000
	M20	187	139	16	55	616073	
	M30	215	165	27	55	620863	

Part. R0748F

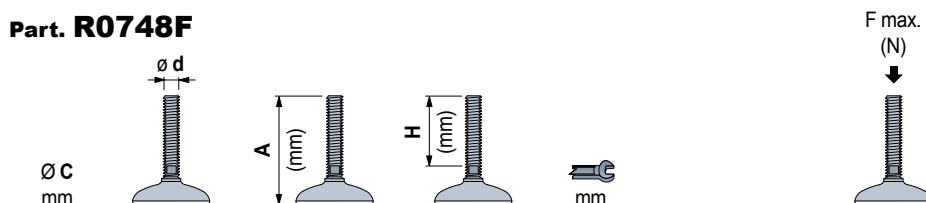

Feet in stainless steel


	M16	185	136	13	67	616103	25000
	M20	190	139	16	67	616113	
	M24	220	167	19	67	616123	
	M30	218	165	27	67	620883	

Item code for order = Part. + Code


- Material:
Spindle in austenitic stainless steel.
Footplate in austenitic stainless steel.
Anti-slip in vulcanized NBR rubber (grey), 75 Shore.
- Packaging: 4 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

Part. R0747F


Part. R0748F

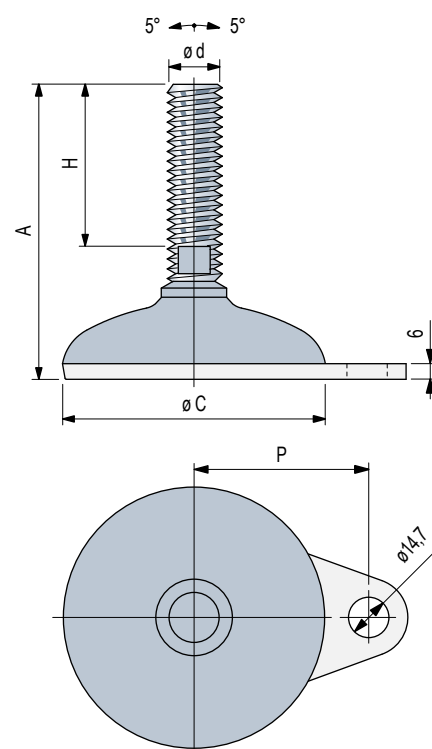

Part. R0750S

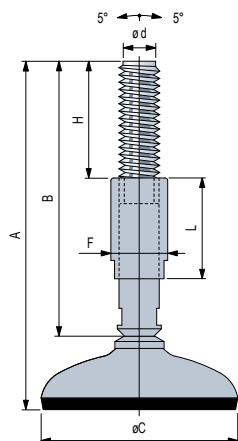

Part. R0750S

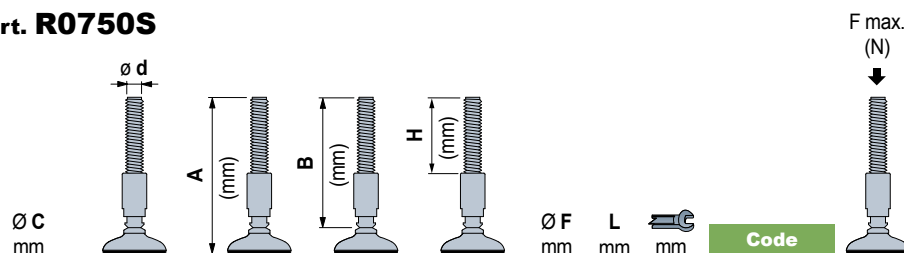


Feet in stainless steel								
Ø 80	M16	200	165	100	23	55	13	613603


Item code for order = Part. + Code

- Material:
Spindle and threaded bushing in austenitic stainless steel.
Footplate in austenitic stainless steel.
Anti-slip in vulcanized NBR rubber (black), 95 Shore.
- Packaging: 4 pieces.
- Fmax. = maximum applicable load in static conditions.

Part. R0750SF

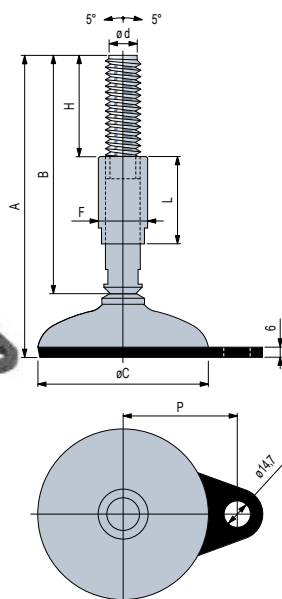

Part. R0750SF

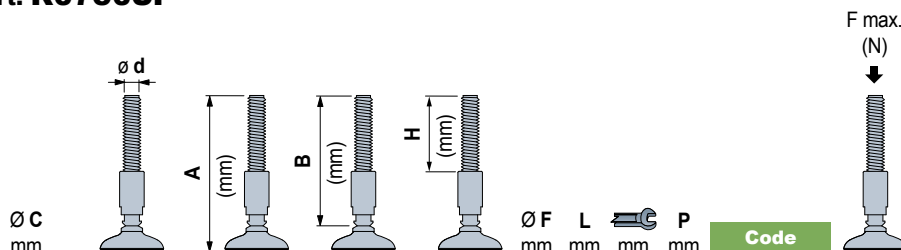

Feet in stainless steel								
Ø 80	M16	200	165	100	23	55	13	616173

Item code for order = Part. + Code

- Material:
Spindle and threaded bushing in austenitic stainless steel.
Footplate in austenitic stainless steel.
Anti-slip in vulcanized NBR rubber (black), 95 Shore.
- Packaging: 4 pieces.
- Fmax. = maximum applicable load in static conditions.




Fixed feet

in painted steel


Ø100

REXNORD

Part. **R0406**



Code



Feet in zinc plated steel

M16

157

127


10

66614

50000

Item code for order = Part. + Code

- Material: footplate in painted steel yellow. Anti-slip in NBR rubber black (80 Shore).
- Packaging: 4 pieces.
- On request different length.
- Fmax. = maximum applicable load in static conditions.

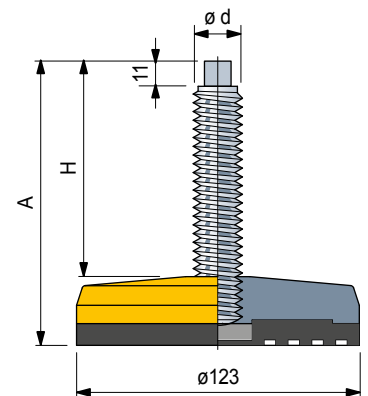

Part. R0180

Tube dimensions

Outside dia. mm	Outside dia. Inch	Thickness mm	Inside dia. mm	Thread D	D1 mm	D2 mm	H mm	L mm	M mm	Code	Fmax. N
48,3	1 1/2	1,5	45,3	M16	48	45,5	10	52	24	63081	5000
54	-	2	50	M16	54	50,8	10	62	24	647081	5000
60,3	2	2	56,3	M16	60	57	10	62	24	65174	5000


- Material: bushing in reinforced polyamid PA FV (black). Threaded insert in nickel plated brass.
- Packaging: 12 pieces.
- Fmax. = maximum applicable load in static conditions.

Tube dimensions B.S.I.

Outside dia. Inch	Outside dia. mm	Thickness Inch	Thickness mm	Inside dia. mm	Thread D	D1 mm	D2 mm	H mm	L mm	M mm	Code	Fmax. N
2"	50,8	0,065"	1,65	47,5	M16	50	48,4	10	56	24	668191	5000

Item code for order = Part. + Code

- Material: bushing in reinforced polyamid PA FV (black). Threaded insert in nickel plated brass.
- Packaging: 12 pieces.
- Fmax. = maximum applicable load in static conditions.



Assembly

Pressure fitted.
Interference fit.



Threaded bushings


for square tubes

Part. **R0224**

Metric tube dimensions

Outside dia. mm	Thickness mm	Inside dia. mm	Thread D	D1 mm	D2 mm	H mm	L mm	M mm	Code	Fmax. N ↓
40	1,5	37	M12	40	37,5	8	43	19	63882	5000
			M16	40	37,5	8	43	24	63902	5000
	2	36	M16	40	36,5	8	43	24	66533	5000
			M20	40	36,5	8	43	30	64455	8000
50	1,5	47	M16	50	47,8	10	55	24	68607	5000
			M20	50	47,5	10	55	30	68883	8000
			3/8"-16	50	47,8	10	55	19	692781	5000
			1/2"-13	50	47,8	10	55	19	692791	5000
			5/8"-11	50	47,8	10	55	24	692801	5000
			3/4"-10	50	47,8	10	55	30	692811	8000
	2	46	M16	50	47	10	55	24	617632	5000
			M20	50	47	10	55	30	617642	8000
	2,5	45	M14	50	45,6	10	55	24	695411	5000
			M16	50	45,5	10	55	24	63051	5000
			M20	50	45,5	10	55	30	63001	8000

- Material: bushing in reinforced polyamid PA FV (black). Threaded insert in nickel plated brass.
- Packaging: 12 pieces.
- Fmax. = maximum applicable load in static conditions.



Tube dimensions B.S.I.

Tube dimensions B.S.I.												Fmax. N ↓
Outside dia.		Thickness		Inside dia.	Thread	D1	D2	H	L	M	Code	
Inch	mm	Inch	mm	mm	D	mm	mm	mm	mm	mm		
2"	50,8	0,109"	2,77	45,3	3/4" 10	50	45,6	10	55	30	59241	8000

Item code for order = Part. + Code

- Material: bushing in reinforced polyamid PA FV (black). Threaded insert in nickel plated brass.
- Packaging: 12 pieces.
- Fmax. = maximum applicable load in static conditions.

Assembly

Pressure fitted.
Interference fit.

